


3G[®] Metric Imperial

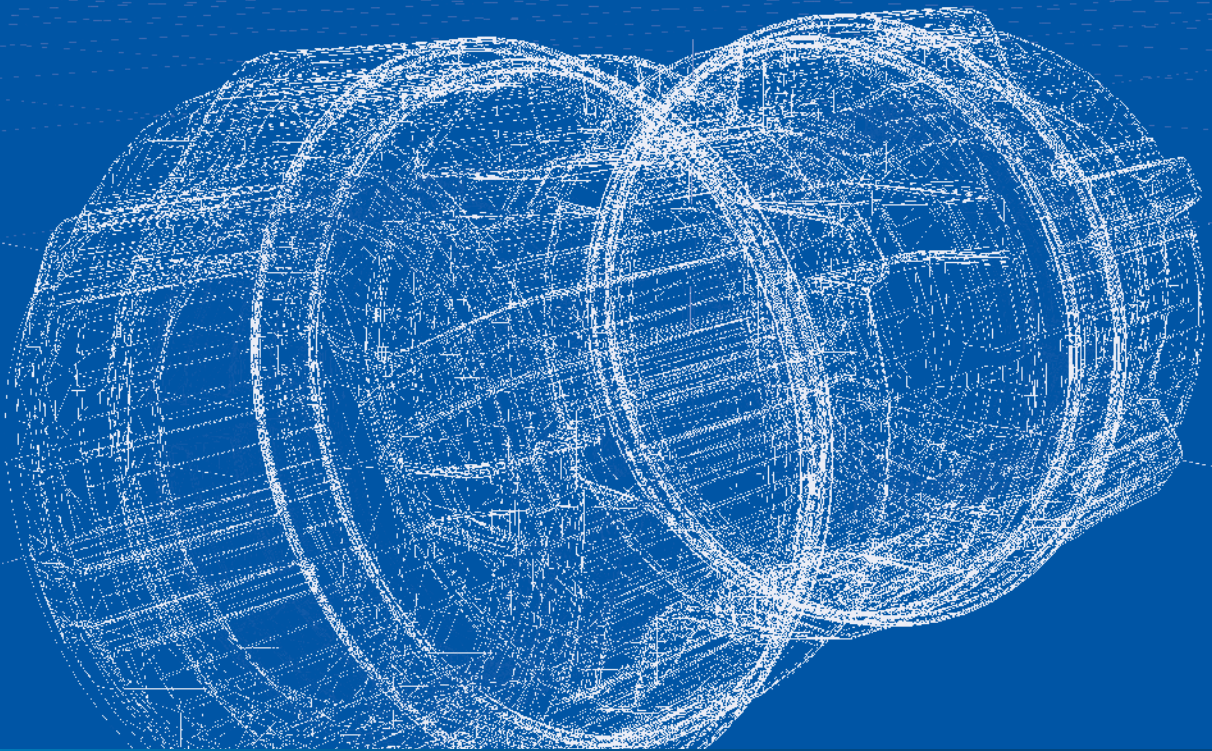

Philmac[®]

The connection you can trust.

For latest prices and delivery to your door visit MyTub Ltd - 0844 556 1818 - www.mytub.co.uk - info@mytub.co.uk





Philmac is well renowned for quality products and services.

Philmac manufactures pipe fittings and valves under a Quality Assurance System assessed and approved to ISO 9001.

Philmac has a NATA accredited laboratory and tests fittings and valves to international and national standards. Third party accreditation is carried out by SAI Global.

CONTENTS

Introduction	2
Benefits	2
Standards	4
Installation	5
Metric/Imperial™	5
Copper	6
Reducing Kit	8
Threaded Fittings	9
System Design Considerations	10
Materials & Components	11
Principals of Operation	11
Product Specification	12
Range Dimensions & Weights	13



Published November 2008
Reference Number: TM3GM1002-1108

Disclaimer

Please note that the information, opinions, recommendations and advice given in this manual are supplied only to provide an improved understanding of the technical aspects of fitting systems.

So far as the law allows, Philmac Pty Ltd will not accept liability in respect of any loss or damage of any kind claimed to arise as a result of reliance upon any information claimed in this manual.

Please refer to our Terms and Conditions of sale.

INTRODUCTION

Philmac, the global leader in the design and manufacture of plastic compression fittings, is proud to release the most innovative and revolutionary product of its kind.

Philmac Metric/Imperial™ is the truly universal polyethylene pipe fitting. The culmination of years of exhaustive research and development, utilisation of cutting-edge manufacturing technology and stringent testing, this new range of premium products could well be the biggest breakthrough in water transfer technology where both metric and imperial pipes are in use. Its universal application means this is the only fitting you need carry, reducing costs and streamlining inventory.

Designed to make the job at hand so much easier, the Philmac Metric/Imperial™ plastic compression fitting is the product of Philmac's unrelenting commitment to continuous improvement and a culture based on innovation and ingenuity.

BENEFITS

Flexibility

- **The Metric & Imperial connection:** The new Philmac Metric/Imperial™ compression fitting is a revolutionary step forward for PE pipe jointing. Connections can now be made to both Metric (BS6572/BS6730) and Imperial PE pipe (BS1972/3284 and IRS 135 Heavy Gauge) from the one fitting from either end. And, the innovative design means that inserts are no longer required to connect imperial pipe.

Removing the need for dedicated fittings and inserts, Metric/Imperial™ provides the ultimate in flexibility, reducing both inventory and complexity.

Fast and easy installation

- **Slide & Tighten™ technology:** Metric/Imperial™ incorporates all the benefits of Philmac's unique Slide & Tighten™ technology. No pipe preparation is needed and no force is required to push the pipe past the seal, so installation couldn't be faster or easier. Simply insert the pipe fully into the fitting and then tighten the nut. Assembly is so easy you can even do it under live conditions. No special tools are required, and there is no need to disassemble the fitting before use because the Metric/Imperial™ compression fitting is supplied pre-assembled and ready to use.
- **Compact Design:** The size of the new Philmac Metric/Imperial™ compression fitting has been kept to a minimum, making the fitting ideal to use in confined areas. In addition to making connections with minimal turns of the nut, the design and size of the fitting means that in installations taking place between pipe with two fixed points, the manipulation of the pipe into the fitting becomes easy.
- **Easy disassembly:** The fitting has been designed so the split collet is released as soon as the nut is backed off, making disassembly easy.

Complete security

- **Dynamic sealing method:** The mechanical advantage of the nut thread compresses the seal into position, eliminating resistance when inserting the pipe into the fitting so there is no risk of seal distortion or displacement.
- **No loose components:** If the nut is removed there is no danger of losing components, as the collet and seal ring are retained in the body of the fitting. Losing components in the trench becomes a thing of the past.
- **Designed to minimise pipe twist:** The fitting has been designed to minimise pipe twist as the nut is tightened. Maximum pipe twist is approximately a quarter turn compared to one and a half turns with many other fittings. Pipe twist can impact on not only the connection you have just made but also on the connection at the other end of the line.
- **Approvals:** Philmac fittings are WRAS approved for above and below ground use.



High performance


- **Made from advanced thermoplastic materials:** Metric/Imperial™ is manufactured from lightweight high performance thermoplastic materials with outstanding impact, UV, chemical and corrosion resistance. The material is non-toxic and taint-free.
- **Rated to 1600 kpa:** Metric/Imperial™ is pressure rated to 1600 kpa (PN16) to meet the needs of high pressure systems.
- **50 year+ design life:** Built to withstand the toughest conditions to ensure longevity and durability, Metric/Imperial™ has a 50 year+ design life.

Complete coverage

- **Wide range:** The new Philmac Metric/Imperial™ range is comprehensive: straight and reducing joiners, tees, elbows, end connectors and caps ranging from 20mm to 63mm. Also available are copper connection kits, normal gauge (IRS 134) connection kits, reducing kits and blanking plugs, ball valves, stopcocks, wall plate elbows and tank connectors.
- **Copper connection Kits:** Philmac's all new carborundum gripper design has been introduced into the Metric/Imperial™ copper connection kit. With no steel components in the gripping mechanism, there is absolutely no risk of electrolysis.



STANDARDS

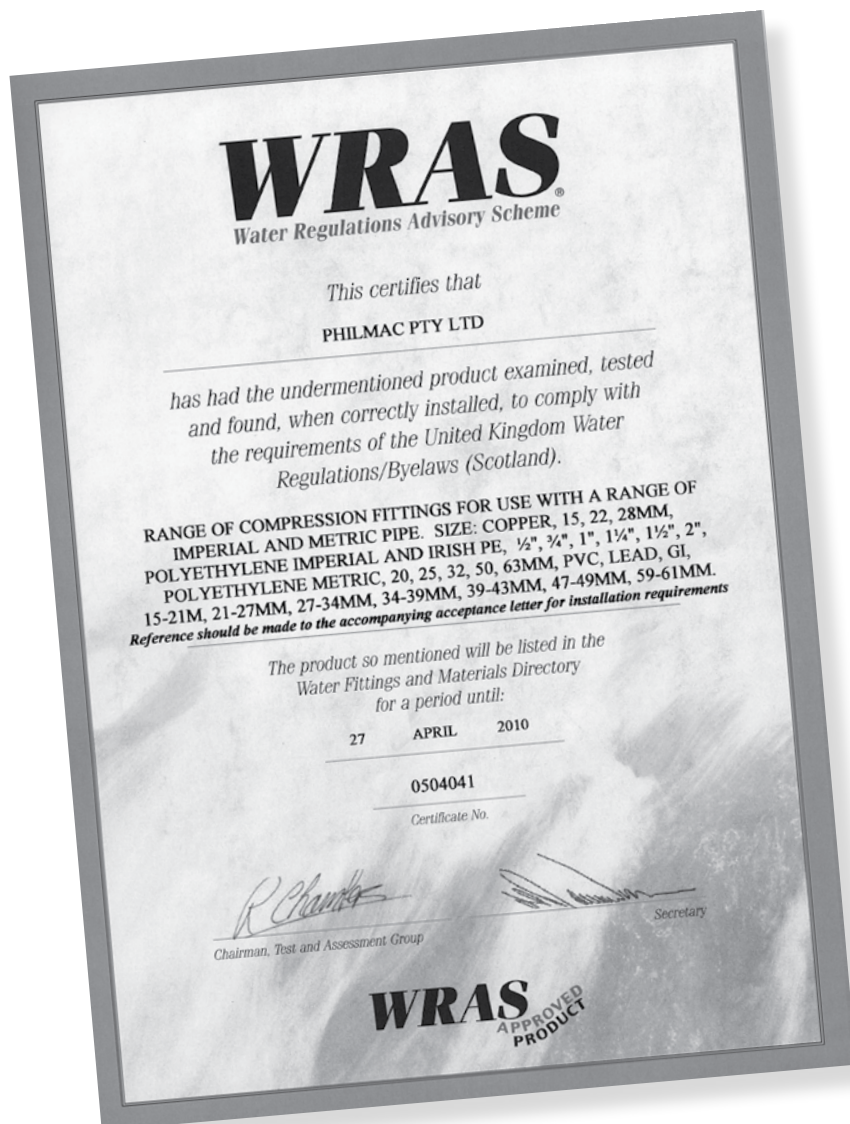

The Philmac Metric/Imperial™ range of compression fittings is approved by WRAS for above and below ground use.

METRIC/IMPERIAL™ INSTALLATION INSTRUCTIONS



1. Cut the Pipe Square

Cut the pipe square. There is no need to prepare the pipe end. Chamfering or lubrication is not required.



2. Insert Liner in MDPE pipe

With MDPE pipe a liner must be used to ensure conformance with WRAS.



3. No Liner or Insert Required for Imperial Pipe

For connections to imperial PE pipe (BS1972/3284 and IRS 135 Heavy Gauge) a liner or insert is not required.



4. Ready to Use Position

The fitting is pre-assembled and ready to use, however always ensure the nut is fully relaxed and 2 threads are showing before inserting the pipe.



5. Pipe Insertion

Insert the pipe fully into the fitting to the point where the stop is felt.



6. Nut Tightening

The nut should be tightened by hand and then firmly with a wrench.



7. Fully Installed

Fitting is now fully installed.



8. Imperial Fully Installed

For connections to Imperial PE pipe (BS1972/3284 and IRS 135 Heavy Gauge) steps 5 to 8 are the same as for MDPE connections.



9. Disassembly

To disassemble the fitting simply loosen the nut using a wrench until 2 threads are showing. Pipe will be released and can simply be pulled out of the fitting.

Note: Philmac recommends the use of PTFE tape on BSP threads to ensure a positive seal.

7. Fully Installed

Fitting is now fully installed.

COPPER ADAPTER fittings for Metric Copper pipe

(suits Copper to EN 1057)

(adaptors also available for copper to other specifications)

Philmac's all new carborundum gripper design has been introduced into the 3G™ copper connection kit.

With no metallic components in the gripping mechanism, there is no risk of electrolysis.



Copper Adapter is supplied fully assembled.

To reassemble - clip pieces together

INSTALLING COPPER ADAPTER



- 1. Disassembly -**
Remove the 3G nut and keep for reinstallation later



- 2. Disassembly -**
Remove the White 3G Collet.
Remove the Black rubber seal.



- 2. Assembly-**
Before installing the Copper Adaptor check the rubber seal and adaptor are assembled correctly.




- 4. Install the Copper Adapter**



- 5. Assembly - Install 3G Metric-Imperial Nut**

COPPER CONNECTION KITS (Metric/Imperial to Copper EN 1057)

From	To	Part No.
20/1/2"	No. 2/15mm	99600200
25/3/4"	No. 2/15mm	99603200
25/3/4"	No. 3/22mm	99600300
32/1"	No. 4/28mm	99600400



INSTALLING COPPER WATER TUBE



1. Cut the Pipe Square

Cut the pipe square. There is no need to prepare the pipe end. Ensure the nut is fully relaxed and there are two threads showing prior to inserting the pipe.



2. Witness Mark the Pipe

To ensure the correct insertion depth, witness mark the pipe by lining up the pipe against the fitting, using the flange of the body as an indicator.



3. Pipe Insertion

Insert the pipe fully into the fitting up to the witness mark.



4. Nut tightening

The nut should be tightened by hand.



5. Nut Tightening

The nut should be tightened firmly with multi-grips or similar plumbing tools until the nut just touches the flange on the body of the fitting.



6. Fully Installed

The fitting is fully installed when the nut butts against the flange of the body.

REDUCING KIT INSTALLATION INSTRUCTIONS



Two styles – one for small size reductions (left) and for large size reductions (right)



1. Disassembly

Take the Metric/Imperial™ fitting and remove the nut. Retain this Metric-Imperial nut for reinstallation later



2. Disassembly

The white split collet and seal ring must then be removed.



3a Install Reducing Kit

Small diameter change kit is illustrated
Take the appropriate connection kit and place it in the body of the fitting with the tapered end pointing outward.



4a Install Nut

Reinstall the Metric-Imperial Nut

Wind the nut onto body, leaving two threads visible

Pipe is installed as per pipe installation instructions



3b Install the Reducing Kit

Large diameter change kit is illustrated
Take the appropriate connection kit and place it in the body of the fitting as per the image above.



4b Install Nut

Reinstall the Metric-Imperial Nut

Wind the nut onto body, leaving two threads visible

Pipe is installed as per pipe installation instructions

THREADED FITTINGS - INSTALLATION INSTRUCTIONS

Philmac 3G™ Compression fittings offer a range of advantages over metal threaded fittings

- **Faster, Easier and Reliable Installation.**
- **Less Effort through lower friction**
- **Based on over 40 years of experience in Europe and Australia**
- **Exploits the properties of Polypropylene to reduce the installation effort compared to metal threads**

Based on over 40 years experience

Philmac manufactured the World's first all-plastic compression fitting in 1968. With over 40 years experience you can trust Philmac 3G™ to perform.

Manufactured from Engineering Plastics

Philmac threaded fitting bodies are manufactured from high performance engineering plastics which delivers significant benefits.

Less Friction

Philmac threaded fittings require significantly less effort to install. Delivered through the use of high performance plastic that provide far less friction than metal on metal threads.

New Approach to Installation

Philmac 3G™ fittings usher in a new era of thread connection. The high performance materials conform to slight irregularities in metal threads, whereas metal to metal joints tend to bind increasing the installation effort.

Smaller Lighter tools

A simple set of multi-grip pliers can be used to install a Philmac threaded fitting. Gone are the days when you need a large wrench to install and tighten a threaded fitting.

Proven Performance

Philmac threaded fittings are built tough and are used world-wide by water companies, civil contractors, plumbers and in rural applications.

Example - Male Adapter into a metal valve



1. Apply PTFE tape or suitable* sealant to the plastic thread ensuring sufficient is applied to ensure a watertight seal.



2. Using your hands, screw the thread of the Male Adapter into the valve until firm.



3. Grip the body of the 3G fitting with Multi-grips or similar plumbing tools and continue to screw the Male Adapter into the valve until tight.

Stop if the shoulder of the 3G™ fittings touches the other fitting..

* **Note:** Philmac recommends the use of PTFE tape on threads to ensure a positive seal. If a liquid or paste sealant is used ensure it is suitable to be used with both Polypropylene and the material being connected to the Philmac fitting.

SYSTEM DESIGN CONSIDERATIONS

There are generally two types of PE pipe fittings; mechanical and thermofusion. Philmac Metric/Imperial™ is a range of mechanical fittings that offers three distinct advantages over thermofusion fittings;

- **More economical**
- **Quick and easy installation**
- **Quick and easy revision to installation**

This section highlights engineering considerations when designing a PE pipe system with Philmac Metric/Imperial™.

Projected life of Compression fittings

Whilst Philmac Metric/Imperial™ conforms to institutionalised specifications written to have a minimum life of 50 years, its compression fittings are intentionally developed to exceed the expectations of these specifications.

Head losses

The following table offers a guide in estimating head losses in PE pipe systems based on the conveyance of water. Use the following formula to estimate this head loss;

$$L = F \times D$$

where F = fitting constant

D = pipe inner diameter (m)

L = head loss based on
equivalent pipe length (m)

Fitting	Fitting Constant (F)
90° elbow	30
90° tee - straight through	12
90° tee - side branch	60

Resistance to Impact

The thermoplastic materials used in the Philmac Metric/Imperial™ fitting have excellent impact properties.

Abrasion Resistance

Philmac Metric/Imperial™ is suitable for the transportation of abrasive slurries and will withstand normal conditions found in urban, mining, industrial, rural water and waste water systems.

Ratings

3G® is cold water rated fitting, rated with a 50+ year design life at 1,600kPa at 20 °C

Weathering

The materials used contain pigments to provide excellent protection to degradation due to ultra-violet radiation. Continuous use of the Philmac Metric Imperial™ fitting in systems above ground is therefore permissible without additional protection.

Electrolytic Corrosion

Philmac Metric/Imperial™ is non magnetizing and does not cause electrolytic deterioration.

Thermal Insulation

Polypropylene has natural thermal insulation of 2000 times over copper and 200 times over steel.

Light Transmission

The all black Philmac Metric/Imperial™ does not transmit light, thus protecting the water quality in potable water pipelines from growth of micro organisms.

Effect on Water

Philmac Metric/Imperial™ does not impart to water any odour, taste, colour, or any constituents in concentrations that could be injurious to health.


Fluids other than Water

Philmac Metric/Imperial™ may convey a wide variety of fluids. The following table is provided as a guide only for the compatibility of various chemicals to Philmac Metric/Imperial™. Contact Philmac for advice on specific applications.

CHEMICAL RESISTANCE


Chemical	Satisfactory	Not Satisfactory
Ammonium Hydroxide	▲	
Alcohol	▲	
Acetone		▲
Auto Transmission Fluid	▲	
Antifreeze	▲	
Benzene		▲
Butane	▲	
Calcium Salts	▲	
Caustic Soda (40% aqueous)	▲	
Cresol		▲
Citric Acid (10% aqueous)	▲	
Copper Salts	▲	
Ethylene Alcohol	▲	
Ethyl Glycol	▲	
Diesel / Gazole	▲	
Formic Acid		▲
Gasoline		▲
Hydrochloric Acid		▲
Kerosene		▲
Mineral Oils	▲	
Methane	▲	
Methylene Chloride		▲
Nitric Acid		▲
Petroleum Oils	▲	
Sewerage	▲	
Sodium Cyanide	▲	
Sulphuric Acid		▲
Toluene		▲
Turpentine		▲
Transformer Oil	▲	
Zinc Salt Solution	▲	
Note: Fluid Temperature = 20°C		

MATERIALS & COMPONENTS

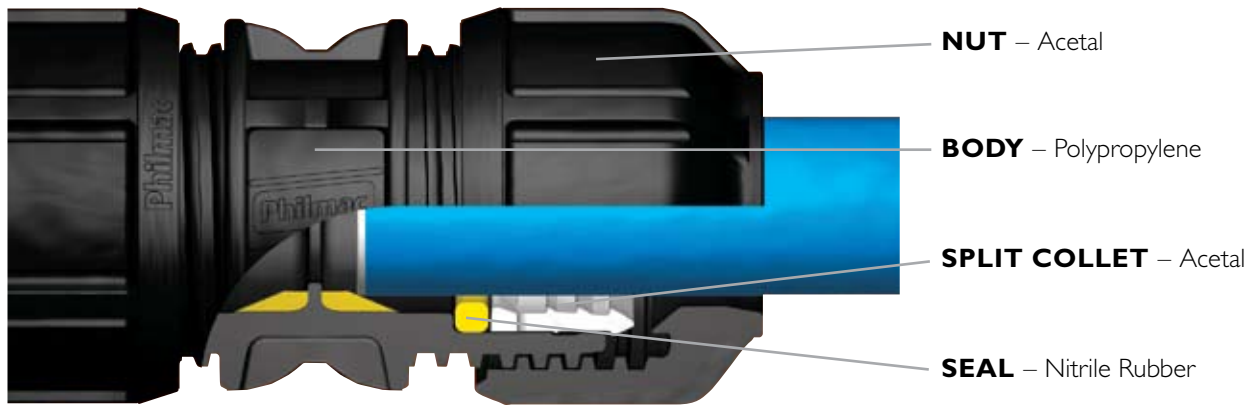


PRINCIPALS OF OPERATION

FULLY OPEN

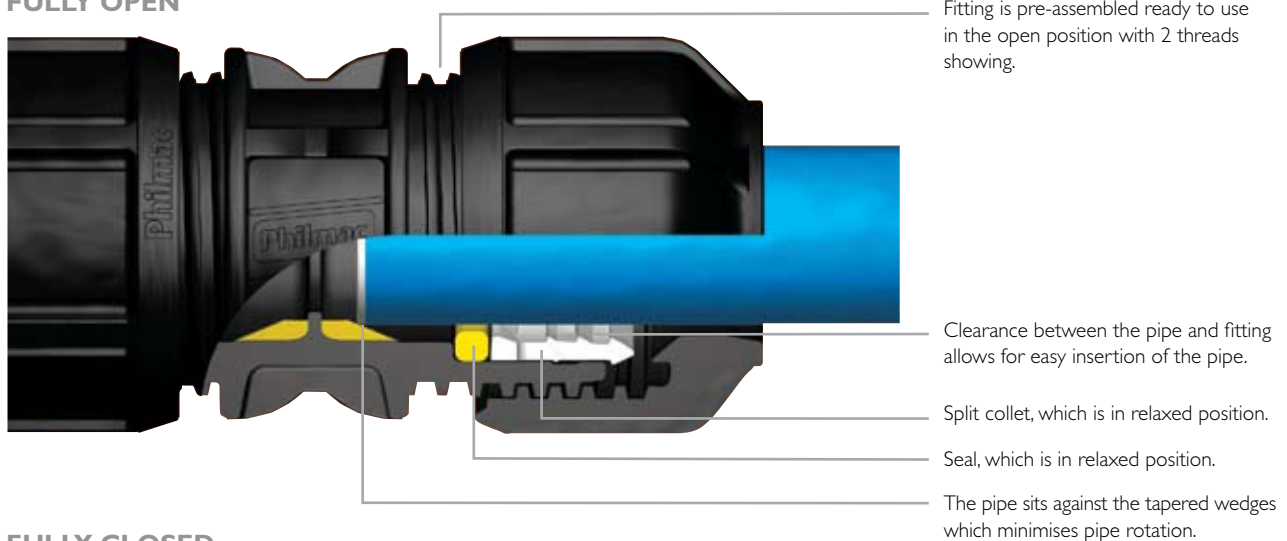

FULLY CLOSED

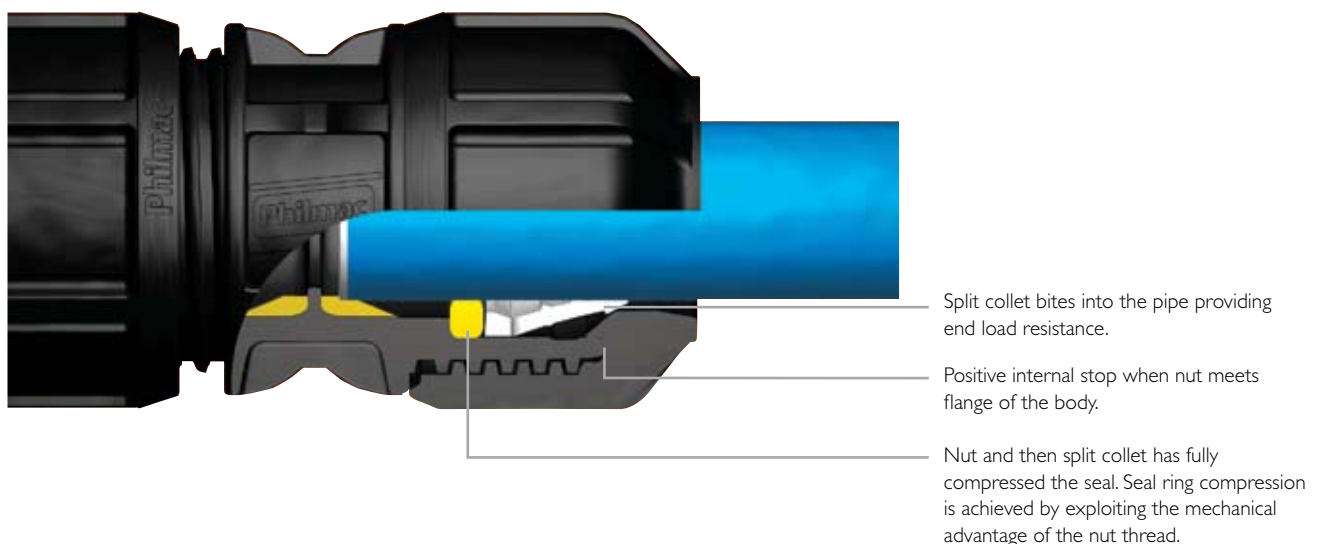

PRODUCT SPECIFICATION – Fittings for PE to PE pipe connection

Manufacturer Accreditation

Only fittings manufactured by Manufacturers with a Quality System approved to ISO9001 or equivalent shall be accepted for use.

Product Performance Accreditation

Fittings for Polyethylene (PE) pipes shall meet the applicable performance requirements of ISO14236 with specific reference to:

- a) Pressure Testing (ISO 3458)
- b) External Pressure resistance testing (ISO 3459)
- c) Resistance to pull out of test assemblies at 20 degrees C (ISO 3501)
- d) Internal pressure resistance when subjected to bending stresses (ISO 3503)

Threaded ends of fittings shall be tapered and conform to BS21 (specification for pipe threads for tubes and fittings where pressure tight joints are made on threads).

Product Material Accreditation

Fittings for Polyethylene (PE) pipes shall be approved to ISO 9080 (Plastic piping and ducting systems – determination of the long term hydrostatic strength of thermoplastic materials in pipe form by extrapolation).

Performance verification shall be according to test parameters outlined in Clause 8.3.2.2 of ISO 14236 – Verification of long term behaviour.

Fittings shall be suitable for the conveyance of drinking water and shall conform to BS6920 (suitability of non metallic products for use in contact with water intended for human consumption with regard to their effect on the quality of water).

Product Configuration/ Material Overview

Fittings shall be compression fitting type.

Fitting bodies shall be of Polypropylene material, nuts shall be of Acetal material. Each fitting shall be supplied complete and pre assembled with captivated collet and seal ring.

Collets shall be in Acetal material and seal rings shall be made from nitrile rubber.

Fitting colour shall be black so as to minimise potential light transmission and/or UV degradation.

Method of Connection

The seal of a joint will be achieved by nut tightening so as to obtain watertightness by a seal ring around the external diameter of the pipe.

Any pipe preparation will be limited to cutting and cleaning of pipe (for foreign material or burrs). Fittings shall not require the pipe to be lubricated or chamfered during installation.

There shall be no loose components during assembly or disassembly (meaning that the fitting shall not be required to be dismantled during assembly or disassembly and if the nut is removed accidentally components will not fall out of the fitting unless removed deliberately).

Connections to both MDPE (BS6572/ BS6730) and Imperial PE (BS1972/3284 and IRS 135 Heavy Gauge) pipe can be achieved at the same end of the fitting without change in components.


RANGE DIMENSIONS & WEIGHTS



RANGE DIMENSIONS & WEIGHTS


JOINERS / COUPLERS (Metric/Imperial X Metric/Imperial)

Size	Part No.	Dimensions mm.			kg.
		S	D	L	
20/1/2" x 20/1/2"	98912200	10	47	90	0.08
25/3/4" x 25/3/4"	98913300	11	55	97	0.12
32/1" x 32/1"	98914400	14	67	118	0.20
40/1-1/4" x 40/1-1/4"	98915500	18	81	136	0.33
50/1-1/2" x 50/1-1/2"	98916600	24	94	161	0.52
63/2" x 63/2"	98917700	29	110	182	0.76

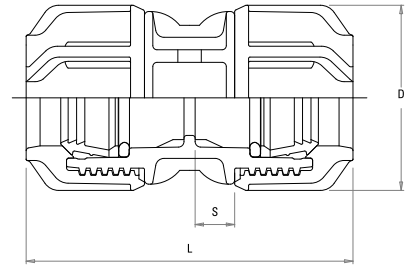


SLIP JOINERS / COUPLERS (Metric/Imperial X Metric/Imperial)

Size	Part No.	Dimensions mm.			kg.
		S	D	L	
20/1/2" x 20/1/2"	98901220	10	47	90	0.08
25/3/4" x 25/3/4"	98901330	11	55	97	0.12
32/1" x 32/1"	98901440	14	67	118	0.20
40/1-1/4" x 40/1-1/4"	98901550	18	81	136	0.33
50/1-1/2" x 50/1-1/2"	98901660	24	94	161	0.52
63/2" x 63/2"	98901770	29	110	182	0.76

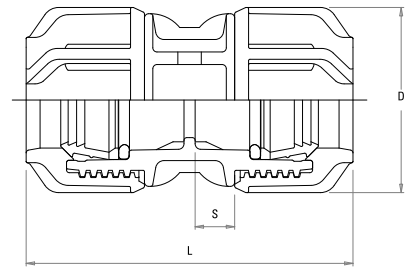

REDUCING JOINERS / COUPLERS (Metric/Imperial X Metric/Imperial)


Size	Part No.	Dimensions mm.					kg.
		S	S1	D	D1	L	
25/3/4" x 20/1/2"	98913200	11	10	55	47	94	0.10
32/1" x 20/1/2"	98914200	14	10	67	47	110	0.14
32/1" x 25/3/4"	98914300	14	11	67	55	108	0.16
40/1-1/4" x 25/3/4"	98915300	18	11	81	55	125	0.24
40/1-1/4" x 32/1"	98915400	18	14	81	67	128	0.28
50/1-1/2" x 25/3/4"	98916300	24	11	94	55	141	0.34
50/1-1/2" x 32/1"	98916400	24	14	94	67	150	0.38
50/1-1/2" x 40/1-1/4"	98916500	24	18	94	81	149	0.44
63/2" x 32/1"	98917400	29	14	110	67	167	0.51
63/2" x 40/1-1/4"	98917500	29	18	110	81	173	0.57
63/2" x 50/1-1/2"	98917600	29	24	110	94	174	0.66

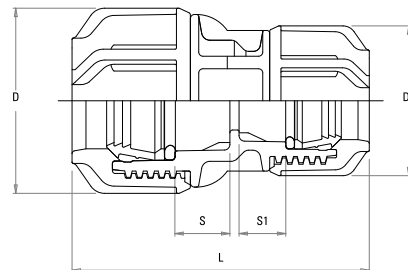

RANGE DIMENSIONS & WEIGHTS


END CONNECTORS / MALE ADAPTORS (Metric/Imperial X MI BSP)

Size	Part No.	Dimensions mm.				kg.
		S	D	L	T	
20/1/2" x 1/2"	98922100	17	47	73	19.8	0.05
20/1/2" x 3/4"	98922200	17	47	75	21.1	0.05
20/1/2" x 1"	98922300	17	47	78	24.4	0.05
25/3/4" x 1/2"	98923100	19	55	81	19.8	0.07
25/3/4" x 3/4"	98923200	19	55	82	21.1	0.07
25/3/4" x 1"	98923300	19	55	85	24.4	0.08
32/1" x 3/4"	98924200	22	67	91	21.1	0.12
32/1" x 1"	98924300	22	67	94	24.4	0.12
32/1" x 1-1/4"	98924400	22	67	97	26.7	0.13
32/1" x 1-1/2"	98924500	22	67	97	26.7	0.13
40/1-1/4" x 1"	98925300	28	81	106	24.4	0.20
40/1-1/4" x 1-1/4"	98925400	28	81	109	26.7	0.20
40/1-1/4" x 1-1/2"	98925500	28	81	109	26.7	0.20
40/1-1/4" x 2"	98925600	28	81	112	31	0.20
50/1-1/2" x 1-1/2"	98926500	30	94	118	26.7	0.30
50/1-1/2" x 2"	98926600	30	94	119	31	0.31
63/2" x 1-1/2"	98927500	36	110	132	26.7	0.40
63/2" x 2"	98927600	36	110	127	31	0.41



END CONNECTORS / FEMALE ADAPTORS (Metric/Imperial X FI BSP)


Size	Part No.	Dimensions mm.				kg.
		S	D	L	T	
20/1/2" x 1/2"	98982100	10	47	71	22.8	0.05
20/1/2" x 3/4"	98982200	10	47	70	24.1	0.05
20/1/2" x 1"	98982300	10	47	73	27.4	0.05
25/3/4" x 1/2"	98983100	11	55	74	22.8	0.08
25/3/4" x 3/4"	98983200	11	55	71	24.1	0.08
25/3/4" x 1"	98983300	11	55	77	27.4	0.08
32/1" x 3/4"	98984200	14	67	89	24.1	0.12
32/1" x 1"	98984300	14	67	88	27.4	0.13
32/1" x 1-1/4"	98984400	14	67	91	30.2	0.13
40/1-1/4" x 1-1/4"	98985400	18	81	101	30.2	0.20
40/1-1/4" x 1-1/2"	98985500	18	81	101	30.2	0.21
50/1-1/2" x 1-1/2"	98986500	24	94	106	30.2	0.29
50/1-1/2" x 2"	98986600	24	94	107	34.5	0.30
63/2" x 2"	98987600	29	110	121	34.5	0.44



RANGE DIMENSIONS & WEIGHTS


TEES (Metric/Imperial X Metric/Imperial X Metric/Imperial)

Size	Part No.	Dimensions mm.					kg.
		S	D	H	G	L	
20/1/2" x 20/1/2" x 20/1/2"	98932200	10	47	59	31	117	0.12
25/3/4" x 25/3/4" x 25/3/4"	98933300	11	55	67	40	134	0.19
32/1" x 32/1" x 32/1"	98934400	14	67	80	48	160	0.33
40/1-1/4" x 40/1-1/4" x 40/1-1/4"	98935500	18	81	95	50	182	0.53
50/1-1/2" x 50/1-1/2" x 50/1-1/2"	98936600	24	94	101	60	202	0.80
63/2" x 63/2" x 63/2"	98937700	29	110	118	73	236	1.22

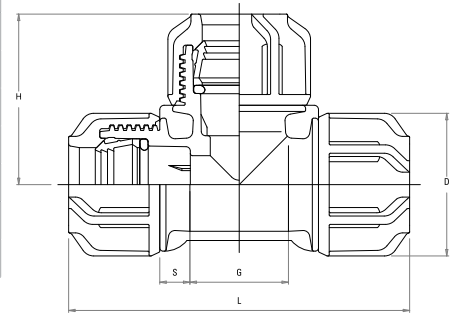

SLIP TEES (Metric/Imperial X Metric/Imperial X Metric/Imperial)


Size	Part No.	Dimensions mm.					kg.
		S	D	H	G	L	
20/1/2" x 20/1/2" x 20/1/2"	98903220	10	47	59	31	117	0.12
25/3/4" x 25/3/4" x 25/3/4"	98903330	11	55	67	40	134	0.19
32/1" x 32/1" x 32/1"	98903440	14	67	80	48	160	0.33
40/1-1/4" x 40/1-1/4" x 40/1-1/4"	98903550	18	81	95	50	182	0.53
50/1-1/2" x 50/1-1/2" x 50/1-1/2"	98903660	24	94	101	60	202	0.80
63/2" x 63/2" x 63/2"	98903770	29	110	118	73	236	1.22

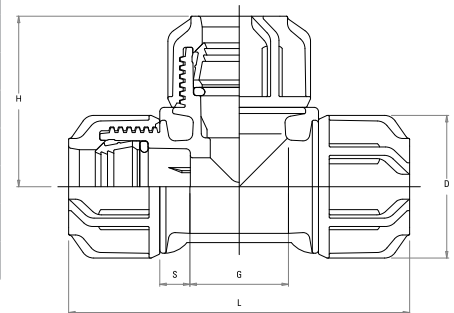

REDUCING TEES (Metric/Imperial X Metric/Imperial X Metric/Imperial)

Slip Reducing Tees are available, please consult a Philmac representative


Size	Part No.	Dimensions mm.							kg.
		S	S1	D	D1	H	G	L	
25/3/4" x 25/3/4" x 20/1/2"	98933200	11	10	55	47	64	40	134	0.18
32/1" x 32/1" x 25/3/4"	98934300	14	11	67	55	74	40	160	0.30
40/1-1/4" x 40/1-1/4" x 25/3/4"	98935300	18	11	81	55	74	34	166	0.40
40/1-1/4" x 40/1-1/4" x 32/1"	98935400	18	14	81	67	84	39	171	0.46
50/1-1/2" x 50/1-1/2" x 25/3/4"	98936300	20	11	94	55	81	35	182	0.63
50/1-1/2" x 50/1-1/2" x 32/1"	98936400	20	14	94	67	90	40	187	0.66
50/1-1/2" x 50/1-1/2" x 40/1-1/4"	98936500	24	21	94	81	98	60	197	0.70
63/2" x 63/2" x 25/3/4"	98937300	24	11	110	55	88	29	196	0.82
63/2" x 63/2" x 32/1-1/4"	98937400	24	14	110	67	98	34	201	0.87
63/2" x 63/2" x 50/1-1/2"	98937600	29	24	110	94	111	73	220	1.05

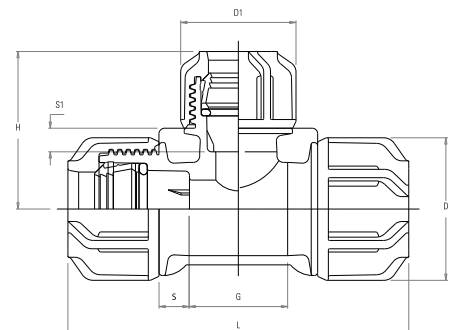

RANGE DIMENSIONS & WEIGHTS


INCREASING TEES (Metric/Imperial X Metric/Imperial X Metric/Imperial)

Size	Part No.	Dimensions mm.							kg.
		S	S1	D	D1	H	G	L	
25/3/4" x 25/3/4" x 32/1"	98933400	11	14	55	64	69	40	134	0.24

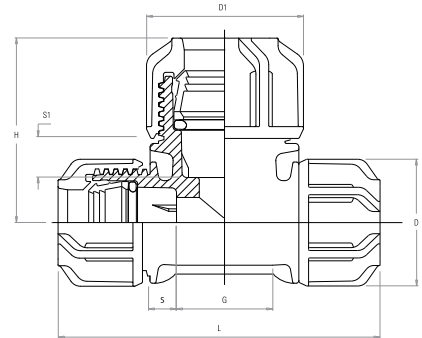


TEES (Metric/Imperial X Metric/Imperial X FI BSP)

Size	Part No.	Dimensions mm.							kg.
		S	D	H	G	L	T	Wt	
20/1/2" x 20/1/2" x 1/2"	98942100	10	47	38	31	117	22.8	0.09	
20/1/2" x 20/1/2" x 3/4"	98942200	10	47	38	31	117	24.1	0.10	
25/3/4" x 25/3/4" x 1/2"	98943100	11	55	40	40	134	22.8	0.14	
25/3/4" x 25/3/4" x 3/4"	98943200	11	55	41	40	134	24.1	0.15	
25/3/4" x 25/3/4" x 1"	98943300	11	55	44	40	134	27.4	0.16	
32/1" x 32/1" x 1/2"	98944100	14	67	42	20	135	22.8	0.21	
32/1" x 32/1" x 3/4"	98944200	14	67	44	48	160	24.1	0.24	
32/1" x 32/1" x 1"	98944300	14	67	44	48	160	27.4	0.25	
32/1" x 32/1" x 1-1/4"	98944400	14	67	50	48	160	30.2	0.26	
40/1-1/4" x 40/1-1/4" x 1/2"	98945100	18	81	48	19	151	22.8	0.33	
40/1-1/4" x 40/1-1/4" x 3/4"	98945200	18	81	50	24	156	24.1	0.34	
40/1-1/4" x 40/1-1/4" x 1-1/4"	98945400	18	81	53	50	182	30.2	0.40	
40/1-1/4" x 40/1-1/4" x 1-1/2"	98945500	18	81	56	50	182	30.2	0.41	
50/1-1/2" x 50/1-1/2" x 1/2"	98946100	24	94	54	19	175	22.8	0.51	
50/1-1/2" x 50/1-1/2" x 3/4"	98946200	24	94	57	24	181	24.1	0.53	
50/1-1/2" x 50/1-1/2" x 1-1/2"	98946500	24	94	67	60	197	30.2	0.58	
50/1-1/2" x 50/1-1/2" x 2"	98946600	24	94	71	60	213	34.5	0.63	
63/2" x 63/2" x 2"	98947600	29	110	77	73	226	34.5	0.89	

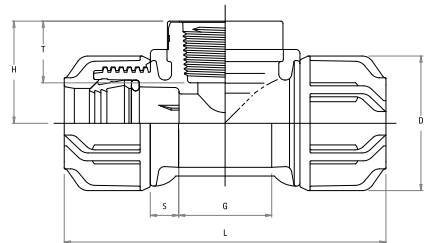

TEES (Metric/Imperial X Metric/Imperial X MI BSP)


Size	Part No.	Dimensions mm.							kg.
		S	D	H	G	L	T	Wt	
25/3/4" x 25/3/4" x 1/2"	98993100	11	55	53	35	114	19.8	0.14	
25/3/4" x 25/3/4" x 3/4"	98993200	11	55	54	35	114	21.1	0.15	

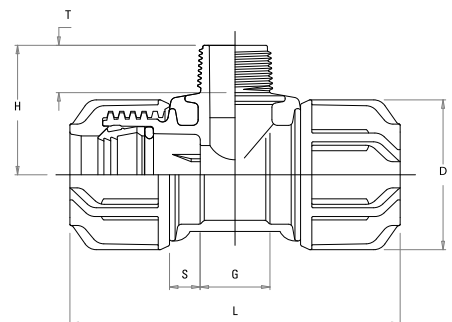

RANGE DIMENSIONS & WEIGHTS


ELBOWS (Metric/Imperial X Metric/Imperial)

Size	Part No.	Dimensions mm.			kg.
		S	D	L	Wt
20/1/2" x 20/1/2"	98952200	10	47	59	0.07
25/3/4" x 20/1/2"	98953200	11	55	65	0.08
25/3/4" x 25/3/4"	98953300	11	55	67	0.13
32/1" x 32/1"	98954400	14	67	80	0.22
40/1-1/4" x 40/1-1/4"	98955500	18	81	91	0.36
50/1-1/2" x 50/1-1/2"	98956600	24	94	101	0.55
63/2" x 63/2"	98957700	29	110	118	0.85

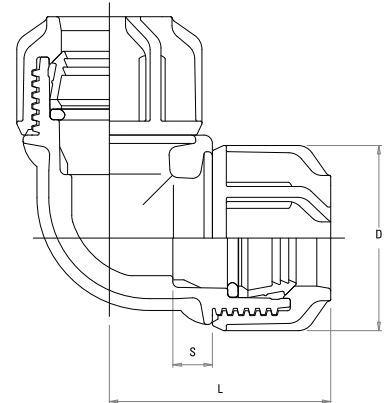

ELBOWS (Metric/Imperial X FI BSP)


Size	Part No.	Dimensions mm.					kg.
		S	D	H	L	T	Wt
20/1/2" x 1/2"	98962100	10	47	73	59	22.8	0.05
20/1/2" x 3/4"	98962200	10	47	73	59	24.1	0.06
25/3/4" x 1/2"	98963100	11	55	88	67	22.8	0.08
25/3/4" x 3/4"	98963200	11	55	88	67	24.1	0.08
25/3/4" x 1"	98963300	11	55	88	67	27.4	0.09
32/1" x 1"	98964300	14	67	105	80	27.4	0.14
32/1" x 1-1/4"	98964400	14	67	105	81	30.2	0.15
40/1-1/4" x 1-1/4"	98965400	18	81	126	91	30.2	0.23
40/1-1/4" x 1-1/2"	98965500	18	81	126	91	30.2	0.24
50/1-1/2" x 1-1/2"	98966500	24	94	142	101	30.2	0.33
50/1-1/2" x 2"	98966600	24	94	142	106	34.5	0.38
63/2" x 2"	98967600	29	110	160	113	34.5	0.53

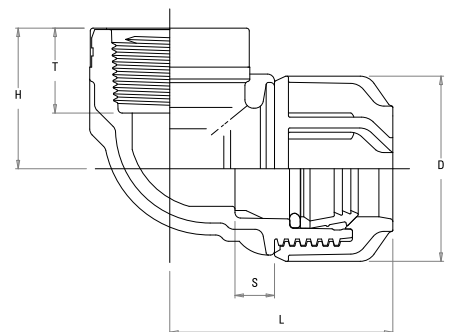

RANGE DIMENSIONS & WEIGHTS


ELBOWS (Metric/Imperial X MI BSP)

Size	Part No.	Dimensions mm.					kg.
		S	D	H	L	T	Wt
20/1/2" x 1/2"	98972100	12	47	43	57	19.8	0.06
25/3/4" x 3/4"	98973200	13	55	49	65	21.1	0.07
32/1" x 1"	98974300	14	67	68	69	24.1	0.07

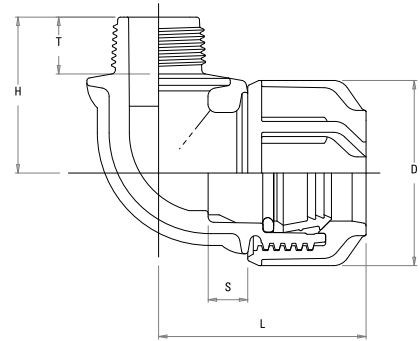


END CAPS (Metric/Imperial)

Size	Part No.	Dimensions mm.			kg.
		S	D	L	Wt
20/1/2"	98902900	19	47	58	0.04
25/3/4"	98903900	23	55	68	0.07
32/1"	98904900	24	67	78	0.11
40/1-1/4"	98905900	31	81	92	0.19
50/1-1/2"	98906900	33	94	105	0.29
63/2"	98907900	41	110	124	0.45




WALL PLATE ELBOWS (Metric/Imperial X FI BSP)

Size	Part No.	Dimensions mm.	
		D	L
20/1/2" x 1/2"	98922600	47	56
25/3/4" x 3/4"	98922700	55	65

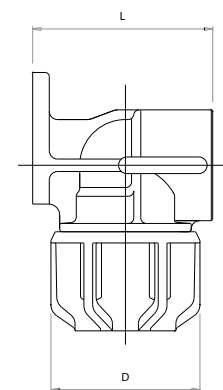

TANK CONNECTORS (Metric/Imperial X MI BSP)


Size	Part No.	Dimensions mm.			kg.
		S	D	L	Wt
25/3/4" x 3/4"	98978000	13	55	109	0.04
32/1" x 1"	98978100	14	67	117	0.07

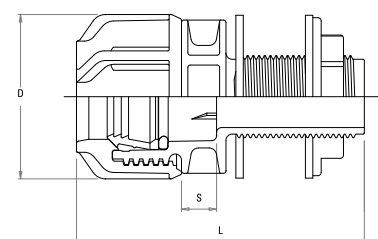

RANGE DIMENSIONS & WEIGHTS


BLANKING PLUGS (Metric/Imperial)

Size	Part No.	Wt (Kg)
20	98912800	0.006
25	98913800	0.010
32	98914800	0.018
50	98915800	0.026
40	98916800	0.040
63	98917800	0.063




REDUCING SETS (Metric/Imperial to Metric/Imperial)

From	To	Part No.
25/3/4"	20/1/2"	99803200
32/1"	20/1/2"	99804200
32/1"	25/3/4"	99804300
50/1-1/2"	25/3/4"	99806300
50/1-1/2"	32/1"	99806400
63/2"	25/3/4"	99807300
63/2"	32/1"	99807400
63/2"	50/1-1/2"	99807600



COPPER CONNECTION KITS (Metric/Imperial to Copper EN 1057)

From	To	Part No.
20/1/2"	No. 2/15mm	99600200
25/3/4"	No. 2/15mm	99603200
25/3/4"	No. 3/22mm	99600300
32/1"	No. 4/28mm	99600400




NORMAL GAUGE CONNECTION KITS (Metric/Imperial to Normal Gauge IRS 134)

From	To	Part No.
20/1/2"	1/2"	99300200
25/3/4"	3/4"	99300300
32/1"	1"	99300400
40/1-1/4"	1-1/4"	99300500
50/1-1/2"	1-1/2"	99300600
63/2"	2"	99300700


SHOULDERED ADAPTOR

Shouldered Adaptors are available to suit PE pipe from 50mm to 110mm,
Please Refer to Large Bore Technical Manual for details

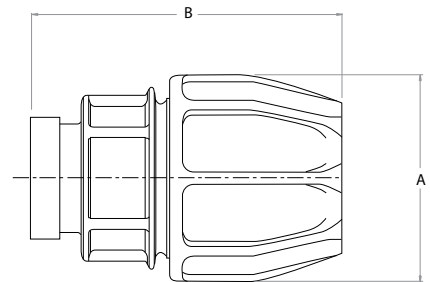


FLANGED ADAPTORS (Pol x Flange)

Flanged Adaptors are available to suit PE pipe from 50mm to 110mm,
Please Refer to Large Bore Technical Manual for details

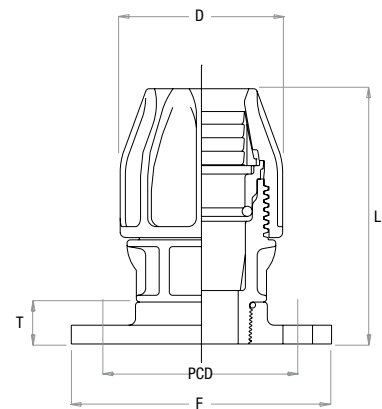


C - SPANNERS

Size (OD)	Ref No	Dimensions mm.	kg.
		L	Wt
20 - 32mm (#2-#4)	90 7024 00	180	0.035
32 - 63mm (#4-#7)	90 7047 00	265	0.110

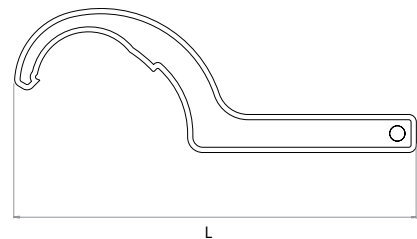

Y - SPANNERS

Size (OD)	Ref No	Dimensions mm.	kg.
		L	Wt
20mm - 32mm (#2-#4)	90 7024 11	182	0.071
40mm - 63mm (#5 - #7)	90 7057 11	415	0.425

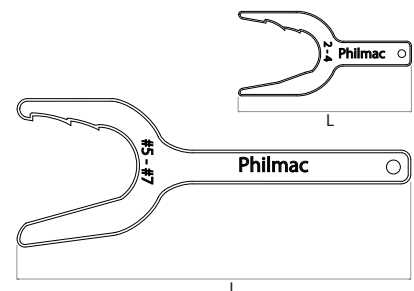

3G fittings can be installed using standard plumbing tools including Multi-grips or a Wrench. Some customers prefer to use a dedicated spanner and Philmac offers two designs. The classic C spanner and the new Y spanner are both available.

Philmac Sales

AUSTRALIA

53-59 Deeds Road
North Plympton
South Australia
AUSTRALIA 5037

Telephone 1800 755 899 (within Australia)
Facsimile 1800 244 688 (within Australia)
Email sales@philmac.com.au
Web www.philmac.com.au

NEW ZEALAND, ASIA PACIFIC, SE ASIA, JAPAN, SOUTH AMERICA & OTHER AREAS

53-59 Deeds Road
North Plympton
South Australia
AUSTRALIA 5037
Telephone +61 8 8300 9217

Facsimile +61 8 8300 9390
Email export@philmac.com.au
Web www.philmac.com.au

UNITED KINGDOM, IRELAND, EUROPE, MIDDLE EAST & AFRICA

Diplocks Way
Hailsham
East Sussex
UNITED KINGDOM BN27 3JF

Telephone +44 1323 847 323
Facsimile +44 1323 844 775
Email sales@philmac.co.uk
Web www.philmac.co.uk

NORTH & CENTRAL AMERICA

PO Box 290995
Phelan
California
USA 92329

Cell +1 (760) 217 4075
Facsimile +1 (760) 868 0470
Email export@philmacinc.com
Web www.philmacinc.com

Philmac UK is a trade name of
Glynwed Pipe Systems Ltd.
Company number 1698059.

Registered Office:
Walsall Road
Norton Canes
Cannock
Staffordshire
WS11 9NS
UNITED KINGDOM