

D298 PN16



Bronze Strainer

A generous use of pipeline strainers will make a significant contribution to the reliability of a piping system and to optimise performance of the equipment - pumps, valves, flow measuring devices, traps etc.

Strainers are a low cost investment for any piping system and result in reduced maintenance costs as well as minimising 'downtime' by protecting the circuit from damage by foreign matter.

Features

- Robust design
- Threaded ends
- Low flow resistance
- High quality materials

Materials

NO.	PART	MATERIAL
1	Body	Bronze to BS EN 1982 CC491K
2	Mesh	Stainless Steel to A.I.S.I. Type 304
3	Cap Seal	PTFE
4	Cap	Bronze to BS EN 1982 CC491K
5	ID Plate	Aluminium

Dimensions & Weights

DN	MESH HOLE Ø (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	MASS (kg)
15	0.75	58	33	40	55	62	27	0.1875
20	0.75	70	42	54	69	80	33	0.3045
25	0.75	88	48	60	80	93	39	0.4260
32	0.75	96	55	69	95	108	49	0.7437
40	0.75	107	61	76	107	118	55	1.0075
50	0.75	126	79	99	135	153	67	1.4600

Pressure/Temperature Ratings

TEMPERATURE (°C)	-10 to 100	170
PRESSURE (BAR)	16	7

Intermediate pressure ratings shall be determined by interpolation.

PRESSURE RATING: PN16

16 bar -10° to 100°C
7 bar at 170°C

TEST PRESSURE: 24 bar hydraulic


SPECIFICATION: Bronze body. Screen 304 stainless steel.

End connections threaded to BS EN 10266 (BS 21 Taper ISO R7) & B1.20.1 ANSI.



D298

Dimensional Drawing

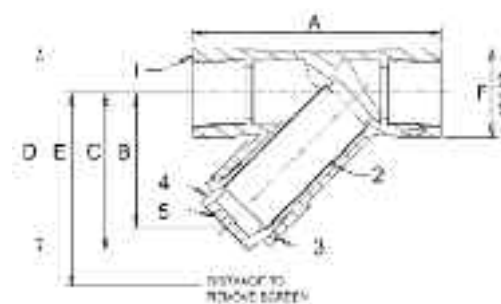

D = withdrawal distance for the screen