




technical drawing

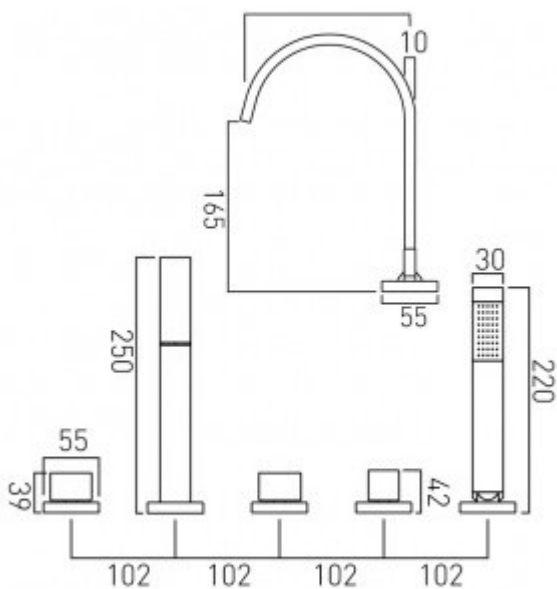

description:

5 hole bath shower mixer
deck mounted
spout can swivel or be fixed
with water flow straightener
3/4" ceramic disc 1/4 turn valves
ceramic cartridge GEO-VALVE/CD/CL-3/4 and
GEO-VALVE/CD/HT-3/4
1 x 1/2" x 3/8" x 200cm showerhose FxF
3 x 3/4" x 3/4" x 500mm flexipipe connections
spout deck mount drill hole diameter 28-30mm
valve deck mount drill hole diameter 37mm
diverter deck mount drill hole diameter 46mm
handset deck mount drill hole diameter 30mm
min-max bath thickness 6-38mm

finishes:

chrome

minimum operating pressure: 1.5 bar MP

ECO flow regulator: FR-SHOWER/9-C/P

guarantee:

12 year guarantee

VADO wedmore road cheddar somerset england bs27 3eb

tel 01934 744466 fax 01934 744345 sales@vado-uk.com www.vado-uk.com