

Bristan recommend E-Cloth for cleaning all of our bathroom & kitchen products. Using just water, E-cloth gives a smear free, deep clean by breaking up and holding dirt, which normal cloths leave behind. Order through your Bristan stockist. (ORDER CODE: ECLOTH)



# BRISTAN

## **GUARANTEE**

All products are manufactured to the highest standards and a 5 year guarantee covers any defect in manufacture.

**All products must have access for servicing or replacement during the life of the product.**

In the interests of continuous product development we reserve the right to alter specification as necessary

**THIS BOOKLET COVERS PRODUCT CODES:**

**ARM WORD01 C  
ARM WOSQ01 C**

## **Round/Square Wall Outlet**

## **Fitting Instructions**

TELEPHONE HELPLINE: 0844 701 6273

Bristan Group Limited  
Birch Coppice Business Park  
Dordon  
Tamworth  
Staffordshire  
B78 1SG  
UK

A Masco Company

Website: [www.bristan.com](http://www.bristan.com)  
Telephone: 0844 701 6274  
Facsimile: 0844 701 6275  
Email: [enquire@bristan.com](mailto:enquire@bristan.com)

(FI ARM WORD\_SQ01 C)

(REV D1)

For latest prices and delivery to your door visit MyTub Ltd - [www.mytub.co.uk](http://www.mytub.co.uk) - [info@mytub.co.uk](mailto:info@mytub.co.uk)

**Please keep these instructions for future reference.**



This wall outlet is intended to be used in conjunction with other products, such as a shower arm and valve.



Before starting any installation project please consider:

Prior to drilling into walls, check there are no hidden electrical wires, cables or water supply pipes with the aid of an electronic detector. If you use power tools do not forget:

- Wear eye protection
- Unplug equipment after use

## COMPONENTS

1. Wall Outlet
2. Shroud
3. Threaded Nipple


## INSTALLATION

The wall outlet should be arranged to accept a supply of flow controllable mixed water.

1. Identify all components and check for completeness before arranging fitting. Ensure that all plumbing is complete to the required position for the wall outlet.
2. Place the shroud (2) over the threaded nipple (3) and onto the wall outlet body (1) prior to fixing it to the wall.
3. Fix outlet to wall and secure in place with the backnut (not supplied), connect the pipework in wall using appropriate adapter and sealant (not supplied).

**NOTE:- Before finishing wall turn on water supplies to check both correct systems function and for leaking from joints/connections.**

## INSTALLATION DIAGRAM

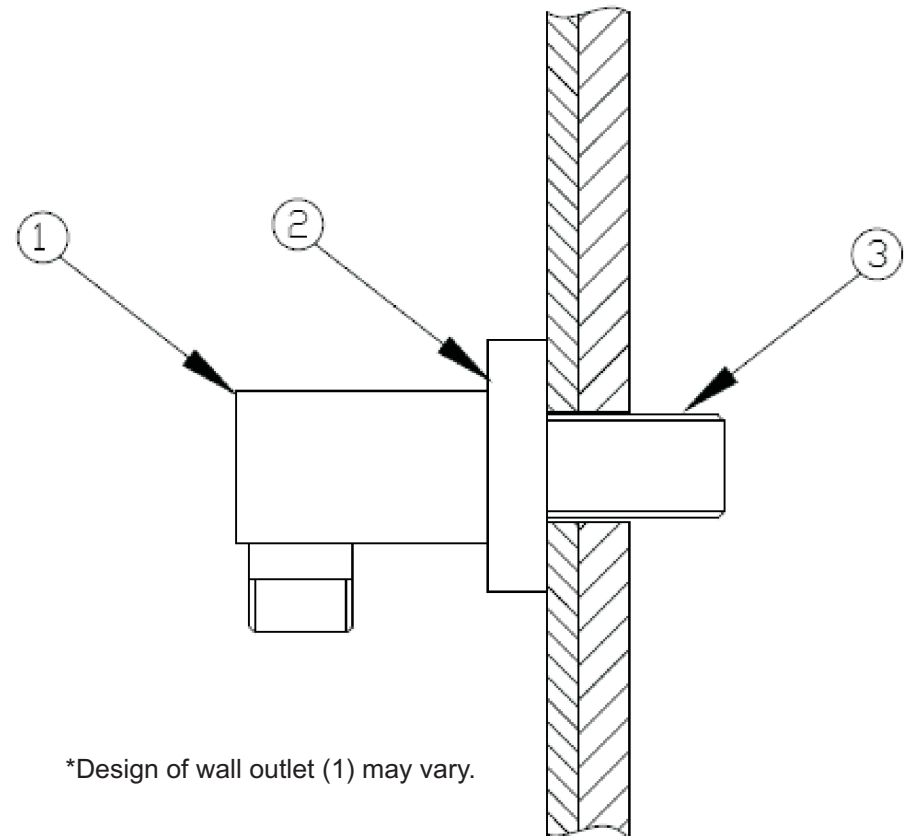

\*Design of wall outlet (1) may vary.

## AFTERCARE INSTRUCTIONS

Your fitting has a high quality finish and should be treated with care to preserve the visible surfaces.

All surface finishes will wear if not cleaned correctly, the only safe way to clean your mixer is to wipe with a soft damp cloth. Stains can be removed using washing up liquid. All bath cleaning powders and liquids will damage the surface of your fitting, even the non-scratch cleaners.

**NOTE: Never use abrasive detergents or disinfectants or those containing alcohol, hydrochloric acid or phosphoric acid.**