



Universal Clicker Basin Waste

(W BSN15 C)

Fitting Instructions & Contents List

Please keep these instructions for future reference and for the ordering of spare parts.

AFTERCARE INSTRUCTIONS

Your fitting has a high quality finish and should be treated with care to preserve the visible surfaces.

All surface finishes will wear if not cleaned correctly, the only safe way to clean your mixer is to wipe with a soft damp cloth. Stains can be removed using washing up liquid. All bath cleaning powders and liquids will damage the surface of your fitting even the non scratch cleaners.

GUARANTEE

All products are manufactured to the highest standards and a 5 year guarantee covers any defect in manufacture.

In the interests of continuous product development we reserve the right to alter specification as necessary

PRODUCT CODE: W BSN15 C

TELEPHONE HELP LINE! +44 (0)870 4425553

Bristan Limited
Lagrange
Lichfield Road Industrial Estate
Tamworth
Staffordshire
B79 7XD
U.K

A MASCO COMPANY
Web Site: www.bristan.com
Telephone: +44 (0)870 4425556
Facsimile: +44 (0)870 4425554
Email: enquire@bristan.com
(FI W BSN15)


(Rev. D1)

(C)



COMPONENTS

1. Clicker Mechanism
2. Rubber Sealing Washer
3. Clicker Adaptor
4. Waste Flange
5. Foam Washer
6. Rubber Washer
7. Waste Body

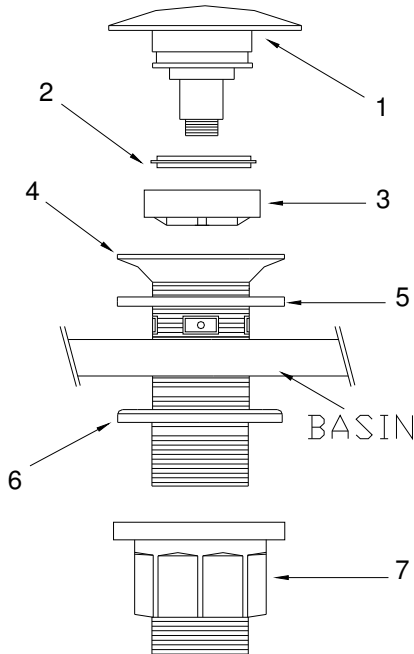

INSTALLATION

1. Identify all components and check for completeness.
2. Remove clicker mechanism (1) and clicker adaptor (3) by pulling from flange (4).
3. Fit rubber washer (6) onto waste body (7) and locate under basin. Fit the foam washer (5) to the flange and screw through basin into the waste body (the multi-purpose tool supplied can be used for this by inserting flat end, with hexagonal protrusion, into slots located inside flange area 4, and turning). It is recommended that a silicon sealant be applied to all sealing faces of washers (5 and 6).
4. Replace clicker mechanism (1) and clicker adaptor (3) back into flange. (When screwing clicker mechanism into clicker adaptor, do not over tighten).
5. Check all joints and connections for leaks.
6. See over the page for aftercare instructions.

Please Note:

- The flange can be cut down to suit in areas where the threads are missing, to suit differing basin thicknesses.
- This waste is supplied un-slotted for basins without an overflow but can be altered to suit. The four rectangular slots located on the flange may be removed, if an overflow system (not included) is desired.

IMPORTANT

if an overflow is not fitted to the basin, it is imperative that any water fittings are turned off before the basin is allowed to overflow.

Please Note: -

In the unlikely event you find a part missing please contact our Customer Service Help line on +44 (0)870 4425553 for immediate despatch of part.