

AFTERCARE INSTRUCTIONS

Your fitting has a high quality finish and should be treated with care to preserve the visible surfaces.

All surface finishes will wear if not cleaned correctly, the only safe way to clean your mixer is to wipe with a soft damp cloth. Stains can be removed using washing up liquid. All bath cleaning powders and liquids will damage the surface of your fitting even the non scratch cleaners.

GUARANTEE

All products are manufactured to the highest standards and a 5 year guarantee covers any defect in manufacture.

NOTE: - the 5 year guarantee on the valve is invalidated if damaged by any waterborne debris.

In the interests of continuous product development Bristan reserve the right to alter specification as necessary.

PRODUCT CODE: QT WMBSM C

TELEPHONE HELP LINE! +44 (0) 870 4425553

Bristan
Birch Coppice Business Park
Dordon
Tamworth
Staffordshire
B78 1SG
UK

Web site: www.bristan.com
Telephone: +44 (0) 870 4425556
Facsimile: +44 (0) 870 4425554
Email: enquire@bristan.com

(FI QT WMBSM)

(D3)

(MZ)

BRISTAN

Quadrant Wall Mounted Bath Shower Mixer


Fitting Instructions

Please keep these instructions for future reference and request of replacement parts.

WATER PRESSURE

This mixer is suitable for use at all supply pressures. However for optimum use both the hot and cold supplies should be reasonably balanced. If the fitting is installed at low pressure (tank fed), then the minimum height from the bath spout to the underside of the cold tank should be 5 metre (0.5 Bar) to ensure adequate performance.

This mixer should be installed in compliance with Water Regulations. Where the supplies are unbalanced, i.e. hot water from the cylinder tank / cold from the mains, approved check valves must be fitted in the supply pipes. For further details contact you're Local Water Authority.

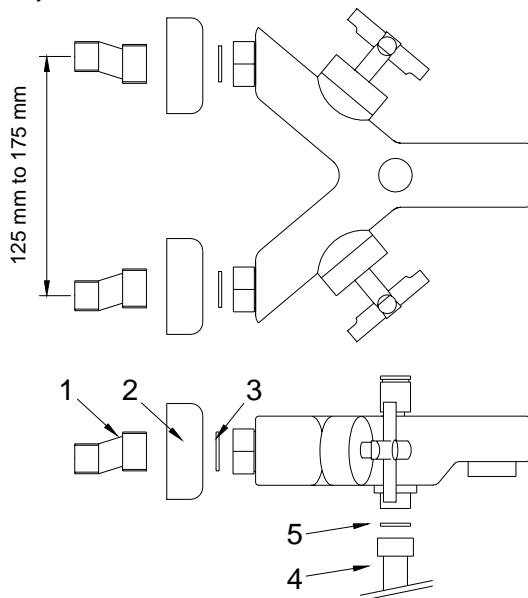

INSTALLATION

1. Identify all components and check for completeness, particularly before arranging fitting.
2. Fit and seal the elbows (1) into the wall connections, 1/2" BSP female (not provided).
3. Fit the flange covers (2) and mixer body to the elbows using the large sealing washers (3) and connect the hot and cold water supplies.
4. Fit the hose (4) to the mixer and the handset (not shown) using the small sealing washers (5).
5. To fit wall bracket. Position, mark out and drill holes to suit, then screw wall bracket to the wall, ensuring that the handset will reach it.
6. Fully open both valves, letting it run for a few minutes to check all joints and connections for leaks.
7. Operate the mixer in both bath and shower mode.
To switch from bath to shower mode, pull the diverter up. After use the mixer automatically reverts to the bath filling mode.
8. See over the page for aftercare instructions.

MAINTENANCE

If the fitting begins to drip:

1. Turn off the water supply.
2. Prise out handle cap, unscrew handle screw and remove handle.
3. Unscrew shroud then remove valve.
4. Carefully clean seating, rubber washer and ceramic disc.
5. Replace valve, shroud and handle then turn on the water supply.
6. If problem persists contact our help line quoting the product code.

NOTE: - As there are no backnuts or fixing plates supplied, the bath shower mixer needs to be connected / supported with rigid pipe work. (Wall mount fittings for exposed and concealed pipe work are available; see Bristan Product and Price Guide).

Please Note: -

In the unlikely event you find a part missing please contact our Customer Service Help line on +44 (0) 870 4425553 for the despatch of part.