

AFTERCARE INSTRUCTIONS

Your fitting has a high quality finish and should be treated with care to preserve the visible surfaces. All surface finishes will wear if not cleaned correctly, the only safe way to clean your bath filler is to wipe with a soft damp cloth. Stains can be removed using washing up liquid. All bath cleaning powders and liquids will damage the surface of your fitting even the non-scratch cleaners.

GUARANTEE

All products are manufactured to the highest standards and a 5 year guarantee covers any defect in manufacture. As gold and special effect finishes are softer than chromium plate, special care must be taken when cleaning; a 3 year guarantee covers these.

NOTE: The 5 year guarantee on the valves is invalidated if damaged by any waterborne debris.

In the interests of continuous product development Bristan reserve the right to alter specification as necessary.

PRODUCT CODE: PM SB C / SAT / ST
TELEPHONE HELPLINE: 0844 701 6273

Bristan Group Ltd
Birch Coppice Business Park
Dordon
Tamworth
Staffordshire
B78 1SG
UK
A Masco Company

Web Site: www.bristan.com
Telephone: 0844 701 6273
Facsimile: 0844 701 6275
Email: enquire@bristan.com

(F1 PM SB)

(D2)

(ST)

BRISTAN

Prism Side Bodies

Fitting Instructions

**Please keep these instructions for future reference
and request of replacement parts.**



For latest prices and delivery to your door visit MyTub Ltd 0845 303 8383 www.mytub.co.uk


These side bodies are intended to be used as a manual control in conjunction with other products, such as, a bath spout or a combined bath fill and overflow from the Bristan range in order to create a system to suit your requirements.

WATER PRESSURE

These fittings are suitable for use at all supply pressures. Depending on outlet choice and whether the fittings are installed at low pressure i.e. tank fed, then the minimum height from the outlet to the underside of the cold tank should be 2 metres to ensure adequate performance. This fitting should be installed in compliance with Water Regulations. Where the supplies are unbalanced i.e. hot water from the cylinder tank/cold from the mains, approved check valves must be fitted in the supply pipes. For further details contact your Local Water Authority.

CONTENTS

- | | | | |
|----------------|------|-----------|------|
| 1. Side Bodies | (x2) | 7. Levers | (x2) |
| 2. Shrouds | (x2) | 8. Valves | (x2) |
| 3. Nuts | (x2) | | |
| 4. Washers | (x2) | | |
| 5. Handles | (x2) | | |
| 6. Grub screws | (x2) | | |

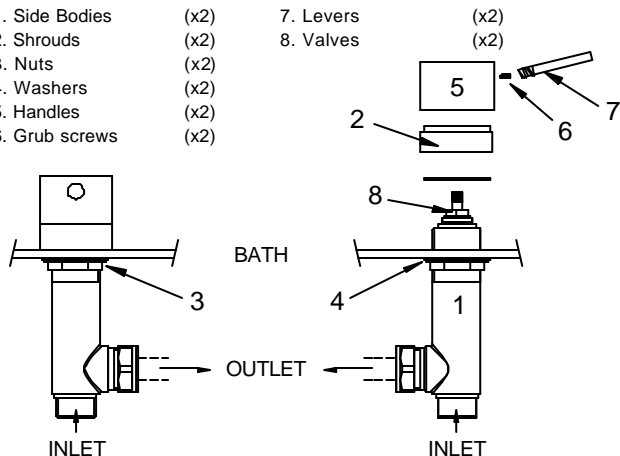

INSTALLATION

1. Identify all components and check for completeness.
2. Fit the side bodies (1) to the bath using the shrouds (with washers) (2) above and the nuts (3) and washers (4) below the bath.
3. Fit the handles (5) to the side bodies making sure the valves are closed with the levers pointing forwards. Secure by tightening the grub screw (6) within the handle concealed by the lever (7).
4. Connect the side bodies to the outlet using suitable lengths of 22mm pipe (not supplied), the 22mm compression fittings and the connections supplied with the chosen outlet fitting.
5. Connect the hot and cold water supplies to the side body inlets.
6. Fully open both valves, letting them run for a few minutes to check all joints and connections for leak
7. See over the page for aftercare instructions.

MAINTENANCE

If the fitting begins to drip:

1. Turn off the water supply.
2. Unscrew lever (7), loosen grub screw (6) with hexagon key and pull off handle (5).
3. Remove valve (8).
4. Carefully clean seating, rubber washer and ceramic disc.
5. Replace valve and handle and turn on the water supply.
6. If problem persists contact our help line quoting the product code.

Please Note: In the unlikely event you find a part missing please contact our Customer Service Help line on 0844 701 6273 for immediate despatch of part.