

AFTERCARE INSTRUCTIONS

Your fitting has a high quality finish and should be treated with care to preserve the visible surfaces. All surface finishes will wear if not cleaned correctly, the only safe way to clean your mixer is to wipe with a soft damp cloth. Stains can be removed using washing up liquid. All bath cleaning powders and liquids will damage the surface of your fitting even the non scratch cleaners.

GUARANTEE

All products are manufactured to the highest standards and a 5 year guarantee covers any defect in manufacture. As the satin finish is softer than chromium plate, special care must be taken when cleaning, a 3 year guarantee covers these finish.

NOTE: The 5 year guarantee on the valve is invalidated if damaged by any waterborne debris.

In the interests of continuous product development Bristan reserve the right to alter specification as necessary.

PRODUCT CODE: PM WMBF C / SAT / ST

TELEPHONE HELP LINE: 0844 701 6273

Bristan Group Ltd
Birch Coppice Business Park
Dordon
Tamworth
Staffordshire
B78 1SG
UK
A Masco Company

Web Site: www.bristan.com
Telephone: 0844 701 6273
Facsimile: 0844 701 6275
Email: enquire@bristan.com
(F1 PM WMBF) (D4)

(ST)

Prism Wall Mounted Bath Filler


Fitting Instructions & Contents List

**Please keep these instructions for future reference
and for the ordering of spare parts**

WATER PRESSURE

This mixer is only suitable for use at mains supply pressures. (Minimum 1.0 bar). For optimum use both the hot and cold supplies should be reasonably balanced.

This mixer should be installed in compliance with Water Regulations. Where the supplies are unbalanced, i.e. hot water from the cylinder tank / cold from the mains, approved check valves must be fitted in the supply pipes. For further details contact your Local Water Authority.

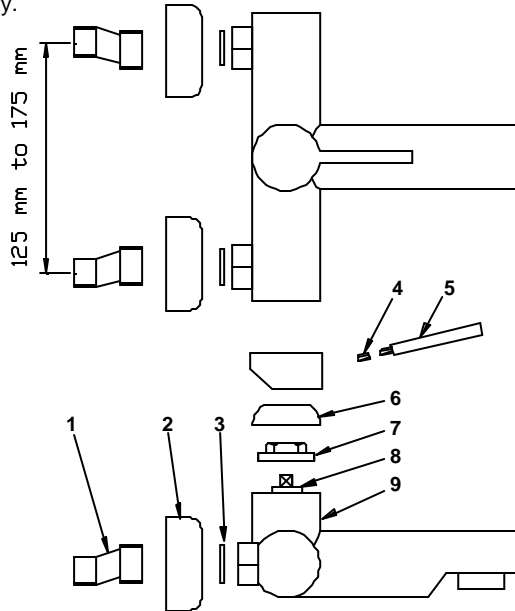

Please Note: In the unlikely event you find a part missing please contact our customer Service Help line on 0844 701 6273 for immediate dispatch of part.

CONTENTS

1.	Cranked Connectors	(x2)
2.	Flange Covers	(x2)
3.	Large Washers	(x2)
4.	Grub Screw	(x2)
5.	Head Lever	(x1)
6.	Shroud	(x1)
7.	Retaining Nut	(x1)
8.	Cartridge	(x1)
9.	Mixer Body	(x1)

INSTALLATION

1. Identify all components and check for completeness, particularly before arranging fitting.
2. Fit and seal the cranked connectors (1) into the wall connections, 1/2" BSP female (not provided).
3. Fit the flange covers (2) and mixer body (9) to the cranked connectors (1) using the large sealing washers (3) and connect the hot and cold water supplies.
4. Fully open the mixer in the mid position, letting it run to check all joints and connections for leaks.
5. See over the page for aftercare instructions.

NOTE : As there are no backnuts or fixing plates supplied, the bath filler needs to be connected / supported with rigid pipe work.

MAINTENANCE

If the fitting begins to drip:

1. Turn off the water supply.
2. Unscrew handle lever (5), loosen grub screw (4) with 2.5mm hexagon key and pull off head.
3. Unscrew retaining nut (7) and remove cartridge (8).
4. Carefully clean seating, rubber washer and ceramic disc. **Note:** that there are locating pins on the bottom of the cartridge that fit in holes inside the tap, to ensure it is fitted the right way round.
5. Replace cartridge and head and turn on the water supply.
6. Contact our helpline if problem persists.