




technical drawing

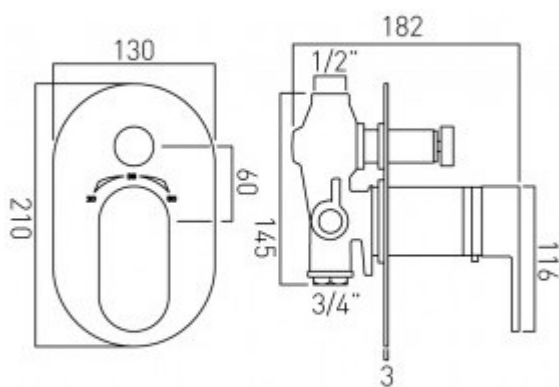

description:

concealed thermostatic shower valve
with diverter
single lever
wall mounted
thermostatic cartridge CAR-KT46
2 x 1/2" female inlets
1 x 1/2" female outlet (top)
1 x 3/4" female outlet (bottom)
min-max wall mount 70-95mm
optimum installation depth 83mm

finishes:

chrome

minimum operating pressure: 1.0 bar MP

guarantee:

12 year guarantee

VADO wedmore road cheddar somerset england bs27 3eb

tel 01934 744466 fax 01934 744345 sales@vado-uk.com www.vado-uk.com