




technical drawing

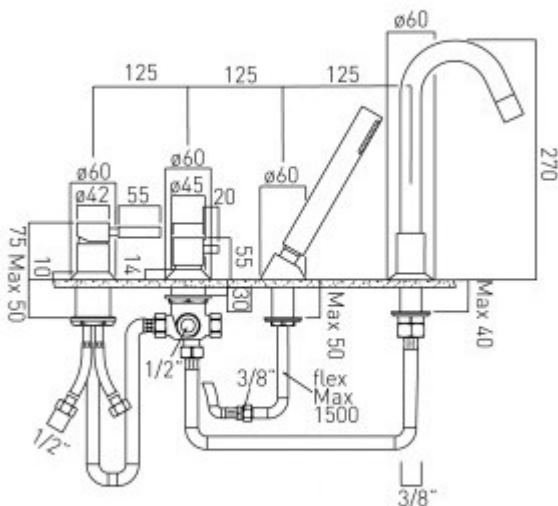

description:

4 hole bath shower mixer
single lever
spout can swivel or be fixed
deck mounted
with water flow straightener
with water flow aerator
ceramic cartridge CAR-K40A
2 x 1/2" nut x 500mm flexipipe connections
2 x 3/4" x 3/4" nut x 600mm flexipipe connections
1 x 1/2" x 3/8" male shower hose 2000mm
handset deck mount drill hole diameter 35mm
spout deck mount drill hole diameter 28mm
valve deck mount drill hole diameter 40mm
diverter deck mount drill hole diameter 46mm

finishes:

chrome

minimum operating pressure: 3.0 bar HP

Eco flow regulator: FR-SHOWER/9-C/P

guarantee:

12 year guarantee

VADO wedmore road cheddar somerset england bs27 3eb

tel 01934 744466 fax 01934 744345 sales@vado-uk.com www.vado-uk.com