

# sola infra red taps

water saving

battery operated



Infra red monobloc

## infra red monobloc (battery operated)

Single **SF2601CP**

## sola electric conversion kit

Conversion kit **SF2600XX**

## thermostatic mixing valve

TMV3 mixing valve - 15mm **SF1337XX**

## applications

Commercial, Education, Hotels & Leisure,  
Other, Security, Special Needs.

BREEAM compliant.

## approvals

W.R.A.S. pending

## finish

Chrome plated CP.

## installation

Power supply 9V battery.

Minimum operating pressure 1.0 bar.

Maximum operating pressure 8 bar.

## note


Minimum sensor range 80mm

Maximum sensor range 300mm

Battery life approximately 4 years with 150  
operations per day.

Security 90 seconds auto shut off.

6 litres per min. flow restrictor fitted, which  
can be removed if required and replaced  
with flow straightener.

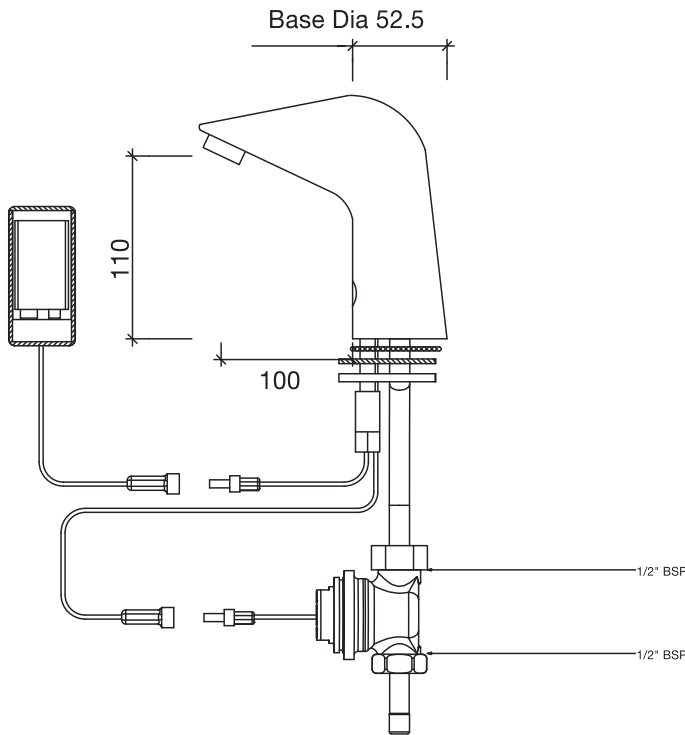

Flow rates SF2601CP					
Pressure (bar)	1.0	2.0	3.0	5.0	8.0
With restrictor (l/min)	4.2	4.9	5.0	5.2	5.2

All measurements shown are in millimetres. drawing sizes are not to scale.  
to specify/order: Please use the 8 character reference shown above.

Lawton Road, Alsager, Stoke-on-Trent ST7 2DF, UK  
Tel: +44(0) 1270 879777 Fax: +44(0) 1270 873864  
www.twyfordbathrooms.com UK Technical Helpline Tel: 0870 840 0437 Fax: 0870 840 0438

**Twyford**  
bathrooms