



# sola infra red spouts

hygienic non touch operation  
anti theft proof  
HTM compliant

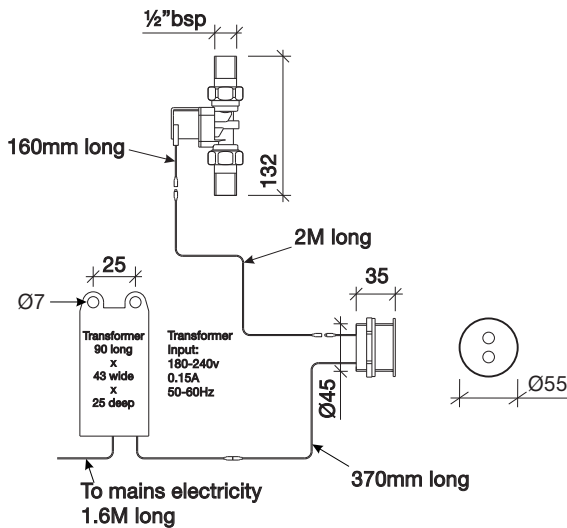

Sola wall mounted infra red spouts: 165mm and 234mm

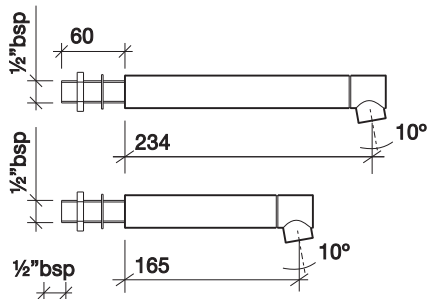

Flow rates SF0165CP & SF0234CP											
Pressure (bar)	0.1	0.2	0.4	0.6	0.8	1.0	1.5	2.0	3.0	4.0	5.0
Flow Rate (l/min)	2.02	2.76	3.83	4.52	4.98	5.21	5.68	5.8	5.75	5.91	5.97

All measurements shown are in millimetres. drawing sizes are not to scale.  
to specify/order: Please use the 8 character reference shown above.

## wall mounted infra red spout, TMV3

165mm long **SF0165CP**  
\*\*HTM, 234mm long **SF0234CP**

## thermostatic mixing valve

\*TMV3 mixing valve - 15mm **SF1337XX**

## applications

Commercial, Healthcare, Other.

## approvals

\*TMV3  
\*\*HTM64 - TB H6  
\*NHS D08  
W.R.A.S.  
Flow regulator fitted for BREEAM compliance.

## finish

Chrome plated CP.

## installation

Min. operating pressure 1.0 bar.  
Maximum dynamic pressure 10 bar.  
Flow - up to 60 seconds.  
Brass back-nuts.  
Flow straightener.