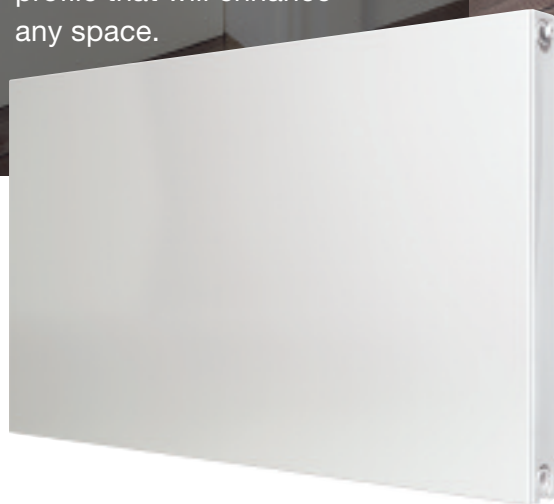


Planar Range

Horizontal

Designer

Simple and understated design makes Planar the ultimate in minimalism for radiators. With its completely flat, smooth finish and integrated top grille and side panels it has a remarkably slim and stylish profile that will enhance any space.



BIM

5
FIVE YEAR
WARRANTY

100 horizontal models

Heights: 300mm to 700mm

Lengths: 400mm to 3000mm

Outputs: 235 to 4901 watts, 802 to 16729 Btu/hr

Types: K1 & K2



@stelrad



facebook.com/stelradradiators



Stelrad[®]

Call **0844 543 6200** visit **Stelrad.com**

For latest prices and delivery to your door visit MyTub Ltd - www.mytub.co.uk - info@mytub.co.uk

Leading the way

mytub

Stelrad Planar Range



50Δt (75/65/20°C)

K1



K2



Height	Length mm	Sections	UIN	Heat output Watts Btu/hr		UIN	Heat output Watts Btu/hr	
300	500	15	140900	235	802	140904	465	1587
	1000	30	140901	469	1600	140905	929	3170
	1400	42	140902	657	2242	140906	1301	4439
	2000	60	140903	938	3200	140907	1858	6339
	400	12	140908	250	853	140917	471	1607
400	600	18	140909	376	1283	140918	706	2409
	800	24	140910	501	1709	140919	942	3214
	1000	30	140911	626	2136	140920	1177	4016
	1200	36	140912	751	2562	140921	1412	4818
	1400	42	140913	876	2989	140922	1648	5623
	1600	48	140914	1002	3419	140923	1883	6425
	1800	54	140915	1127	3845	140924	2119	7230
	2000	60	140916	1252	4272	140925	2354	8032
	400	12	140926	310	1058	140935	564	1924
	600	18	140927	464	1583	140936	847	2890
500	800	24	140928	619	2112	140937	1129	3852
	1000	30	140929	774	2641	140938	1411	4814
	1200	36	140930	929	3170	140939	1693	5777
	1400	42	140931	1084	3699	140940	1975	6739
	1600	48	140932	1238	4224	140941	2258	7704
	1800	54	140933	1393	4753	140942	2540	8666
	2000	60	140934	1548	5282	140943	2822	9629
	2200	66	141100	1702	5812	141105	3105	10595
	2400	72	141101	1858	6341	141106	3386	11556
	2600	78	141102	2013	6871	141107	3668	12518
600	2800	84	141103	2168	7394	141108	3950	13486
	3000	90	141104	2321	7924	141109	4234	14448
	400	12	140944	364	1242	140953	654	2231
	600	18	140945	547	1866	140954	980	3344
	800	24	140946	729	2487	140955	1307	4459
	1000	30	140947	911	3108	140956	1634	5575
	1200	36	140948	1093	3729	140957	1961	6691
	1400	42	140949	1275	4350	140958	2288	7807
	1600	48	140950	1458	4975	140959	2614	8919
	1800	54	140951	1640	5596	140960	2941	10035
700	2000	60	140952	1822	6217	140961	3268	11150
	2200	66	141110	2005	6840	141115	3594	12269
	2400	72	141111	2186	7461	141116	3922	13386
	2600	78	141112	2368	8081	141117	4249	14502
	2800	84	141113	2550	8708	141118	4576	15613
	3000	90	141114	2734	9329	141119	4901	16729
	400	12	140974	415	1416	140983	739	2521
	600	18	140975	623	2126	140984	1109	3783
	800	30	140976	830	2832	140985	1478	5044
	1000	36	140977	1038	3542	140986	1848	6305
700	1200	42	140978	1246	4251	140987	2218	7566
	1400	48	140979	1453	4958	140988	2587	8828
	1600	54	140980	1661	5667	140989	2957	10089
	1800	60	140981	1868	6374	140990	3326	11350
	2000	66	140982	2076	7083	140991	3696	12611

Please note: All products over 2 metres wide will take 6 weeks to be delivered from date of order. When this product is ordered it cannot be cancelled.

Δt50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C if you have a low temperature heat source you may wish to consider Δt40 or Δt30 output (see your installer or system designer).

Stelrad Planar Range



30Δt (55/45/20°C)

K1



K2



Height	Length mm	Sections	UIN	Heat output Watts Btu/hr		UIN	Heat output Watts Btu/hr	
300	500	15	140900	121	413	140904	239	817
	1000	30	140901	242	824	140905	478	1632
	1400	42	140902	338	1154	140906	670	2286
	2000	60	140903	483	1648	140907	957	3265
	400	12	140908	129	439	140917	243	828
400	600	18	140909	194	661	140918	364	1241
	800	24	140910	258	880	140919	485	1655
	1000	30	140911	322	1100	140920	606	2068
	1200	36	140912	387	1320	140921	727	2481
	1400	42	140913	451	1539	140922	849	2896
	1600	48	140914	516	1761	140923	970	3309
	1800	54	140915	580	1980	140924	1091	3723
	2000	60	140916	645	2200	140925	1212	4136
	400	12	140926	160	545	140935	290	991
	600	18	140927	239	815	140936	436	1488
500	800	24	140928	319	1088	140937	581	1984
	1000	30	140929	399	1360	140938	727	2479
	1200	36	140930	478	1632	140939	872	2975
	1400	42	140931	558	1905	140940	1017	3470
	1600	48	140932	638	2175	140941	1163	3968
	1800	54	140933	717	2448	140942	1308	4463
	2000	60	140934	797	2720	140943	1453	4959
	2200	66	141100	877	2992	141105	1599	5454
	2400	72	141101	957	3265	141106	1744	5950
	2600	78	141102	1036	3535	141107	1890	6447
600	2800	84	141103	1116	3808	141108	2035	6943
	3000	90	141104	1196	4080	141109	2180	7438
	400	12	140944	187	640	140953	337	1149
	600	18	140945	282	961	140954	505	1722
	800	24	140946	375	1281	140955	673	2297
	1000	30	140947	469	1601	140956	842	2871
	1200	36	140948	563	1921	140957	1010	3446
	1400	42	140949	657	2240	140958	1178	4020
	1600	48	140950	751	2562	140959	1346	4593
	1800	54	140951	845	2882	140960	1515	5168
700	2000	60	140952	938	3202	140961	1683	5742
	2200	66	141110	1032	3521	141115	1851	6317
	2400	72	141111	1126	3841	141116	2020	6892
	2600	78	141112	1220	4163	141117	2188	7465
	2800	84	141113	1314	4483	141118	2356	8039
	3000	90	141114	1407	4802	141119	2525	8614
	400	12	140974	214	729	140983	381	1282
	600	18	140975	321	1095	140984	571	1948
	800	30	140976	427	1458	140985	761	2598
	1000	36	140977	535	1824	140986	952	3247
700	1200	42	140978	642	2189	140987	1142	3897
	1400	48	140979	748	2553	140988	1332	4546
	1600	54	140980	855	2919	140989	1523	5196
	1800	60	140981	962	3282	140990	1713	5845
	2000	66	140982	1069	3648	140991	1903	6495

Please note: All products over 2 metres wide will take 6 weeks to be delivered from date of order. When this product is ordered it cannot be cancelled.

Stelrad Planar Range




EN 442 Certification Data - CETIAT tested in accordance with BS EN 442

Type	K1					K2				
Height	300	400	500	600	700	300	400	500	600	700
W/m at 75/65/20	469	629	774	911	1038	929	1177	1411	1634	1848
n-coefficients	1.30	1.29	1.28	1.27	1.27	1.29	1.30	1.31	1.32	1.33
Heated Surface Area (m ² /m)	2.09	2.95	3.80	4.66	5.51	3.51	4.92	6.33	7.74	9.15
Weight (kg/m)	11.88	16.13	20.39	24.65	28.91	19.60	26.40	33.20	40.00	46.80
Water contents (l/m)	1.89	2.34	2.80	3.25	3.77	3.70	4.67	5.63	6.60	7.63
Wall to tap centre (mm)	54	54	54	54	54	76	76	76	76	76


Planar Horizontal mounting brackets

All dimensions in mm. Inches in brackets.

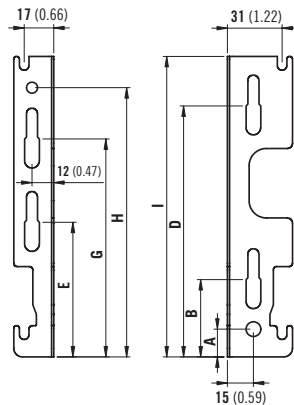Floor mounting brackets available. See page 42.




**K1 and K2
(300mm)**

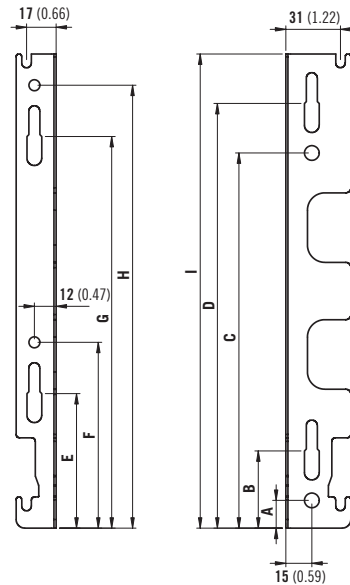

**K1 and K2
(400, 500 & 600mm)**

Dimensions	mm	in	mm	in	mm	in	mm	in
	300	11.81	400	15.75	500	19.69	600	23.62
A	16	0.62	16	0.62	16	0.62	16	0.62
B	44	1.73	44	1.73	44	1.73	44	1.73
C	-	-	216	8.50	316	12.44	416	16.37
D	144	5.66	244	9.60	344	13.54	444	17.48
E	77	3.03	77	3.03	77	3.03	77	3.03
F	-	-	107	4.21	107	4.21	107	4.21
G	125	4.92	225	8.85	325	12.79	425	16.73
H	155	6.10	255	10.03	355	13.97	455	17.91
I	173	6.81	273	10.74	373	14.68	473	18.62


	L	400	500 1100	1200	1400 1800	2000 3000
H	Number	2pc				3pc
300	C	117	150	250	250	250
500	E	-	-	-	-	L/2+17

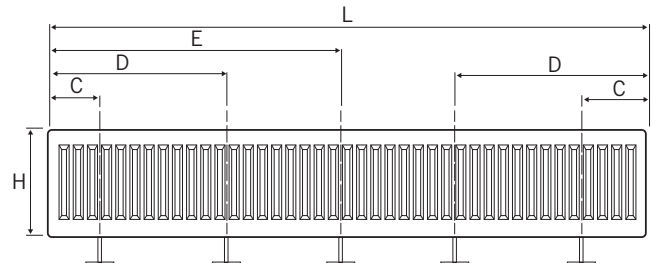

	L	400	500 1100	1200	1400 1800	2000	2200	2400	2600	2800	3000
H	Number	2pc				3pc	4pc				
600	C	117	150	250	250	250	250				
700	D	-	-	-	-	750	817	850	750	817	850
	E	-	-	-	817	-	-	-	L/2+17		

K1 and K2 lug positions

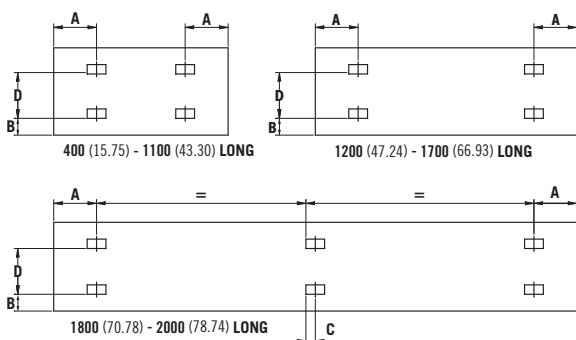All dimensions in mm. Inches in brackets.




		K1		Panel Height		D	
Dimensions		mm	in	mm	in	mm	in
A	400mm	117	4.61	300	11.81	155	6.10
A	500 - 1100mm	150	5.91	400	15.75	255	10.04
A	1200 - 2000mm	283	11.14	500	19.69	355	13.98
B	All	60	2.36	600	23.62	455	17.93
C	1800 - 3000mm	17	0.67				

		K2	
Dimensions		mm	in
A	400 - 1100mm	133	5.24
A	1200 - 2000mm	267	10.50
B	All	60	2.36

Planar wall mounting information

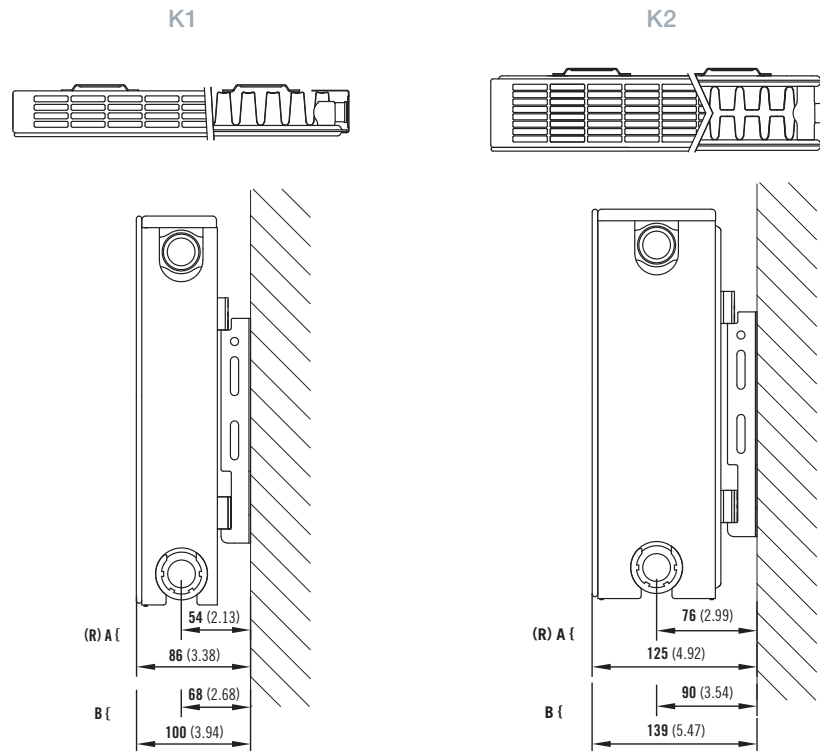
All dimensions in mm. Inches in brackets.



Planar bracket position

A = Closest to Wall B = Furthest from Wall (R) = Recommended Mounting Position

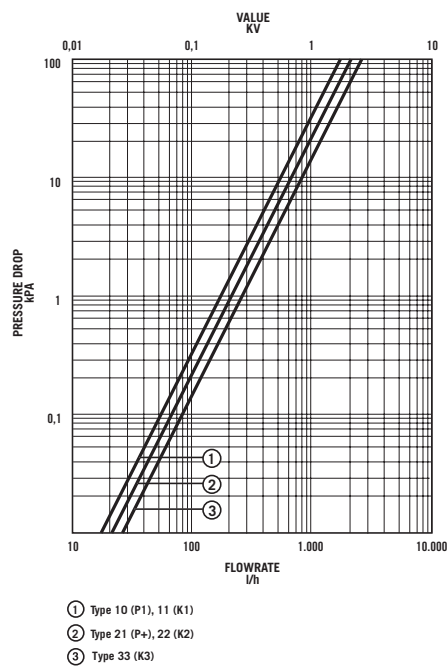Pressure drops







colourful inspiration


A shade for every room, for every interior. Opt for warm elegance, baroque ambience or modern minimalism. With Stelrad, you can heat your home in colour. Choose from a full range of stylish radiator colours.

Below colours for Planar Range





Natural Colour

						
NT110 Papyrus white	NT120 Pearl white	NT130 Champagne	NT140 Beige	NT150 Beige grey	NT160 Pebble grey	NT170 Quartz grey
						
SN110 Cream white	SN120 Cream	SN130 Mocca	SN140 Bordeaux	SN150 Sepia	SN160 Pale blue	SN170 Black

Metallic Colours

						
ML110 Dove grey	ML120 Titanium grey	ML130 Blue grey	ML140 Granite	ML150 Cappuccino	ML160 Terra brown	ML170 Graphite black

RAL Colours

						
A1004 Golden yellow	A2003 Pastel orange	A3002 Carmine red	A3003 Robin red	A5002 Ultramarine blue	A6018 Yellow green	A7001 Silver grey
						
A7011 Iron grey	A7016 Anthracite grey	A7030 Stone grey	A7035 Light grey	A8017 Chocolate brown	A9003 Signal white	A9005 Jet black

Please note: When a coloured radiator or radiators over 2 metres have been ordered they cannot be cancelled or returned. All colour radiators have a 6 week lead time.

To request a colour chart and details of how to order please email marketing@stelrad.com