


## TECHNICAL DATASHEET

### Value Cross Head Range Value Cross Head Bath Shower Mixer

#### Product Specification

<b>Product Code:</b>	VAX BSM E6 C, VAX BSM E8 C
<b>Finish:</b>	Chrome Plated
<b>Product Type:</b>	Contemporary
<b>Construction:</b>	Body is of brass construction and is designed to conform to BS EN 200.
<b>Valve Type:</b>	1/2" standard valve
<b>Supply:</b>	Suitable for all plumbing systems (Preferably balanced)
<b>Inlet Connections:</b>	3/4" BSP
<b>Outlet Connection:</b>	G 1/2"
<b>Working Pressures:</b>	Min 0.2bar, Max 7.0bar
<b>Dimensions for Fitting:</b>	180mm inlet centres

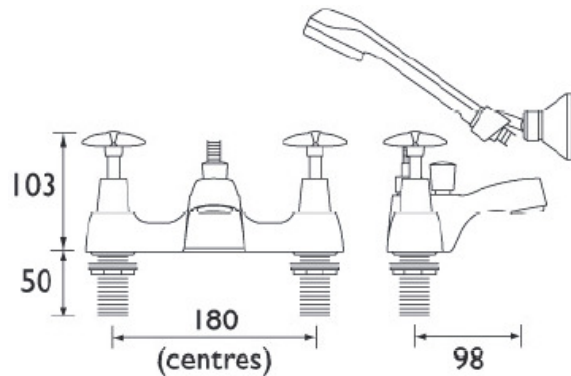

1500mm HOSE, RUB CLEAN  
HANDSET & WALL BRACKET

#### Additional Information

- Supplied with metal handles
- Supplied with metal backnuts
- Chrome plated to BS EN 248
- Supplied with single function rub clean handset, 1.5m hose & wall bracket
- Product supplied with either a 6 or 8 litre per minute flow regulator which can be fitted to the shower hose outlet to reduce water consumption and increase water efficiency. (Flow Regulator accurate +/- 10%).

**Technical Advice:** For further information please call 0844 7016273 or email [customer-care@bristan.com](mailto:customer-care@bristan.com)

**Guarantee:** 5 years covering manufacturing faults.

#### Compliance/Approvals

Manufactured to comply with WRAS

#### Flow Rates (litres per minute)

System Pressure	0.2bar	0.5bar	1bar	2bar	3bar	5bar
To Bath Fill	32.4	46.2	72.8	102.2	125.2	161.6
With 6 l/p/m Flow Regulator Fitted (To Shower Outlet)	--	--	6.0	6.0	6.0	6.0
With 8 l/p/m Flow Regulator Fitted (To Shower Outlet)	--	--	8.0	8.0	8.0	8.0

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG  
Telephone: 0844 701 6274 Facsimile: 0844 701 6275  
Web Site: [www.bristan.com](http://www.bristan.com) Email: [enquire@bristan.com](mailto:enquire@bristan.com)



The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuing improvement in design and performance of its products and so reserves the right to change specifications without prior notice.