

TECHNICAL DATA SHEET

JOY ELECTRIC SHOWERS

Joy 8.5kW / 9.5kW

Product Specification

Product Code:	JOYT85 W / JOYT95 W
Finish:	White
Product Type:	Contemporary
Construction:	Plastic (ABS)
Supply:	Suitable for mains cold feed only
Inlet Connections:	15mm push fit, 5 directional options
Outlet Connections:	G ½"
Working Pressures:	Min 0.7bar, Max 10.0bar



Additional Information

- Instantaneous electric shower drawing water direct from the mains supply; ideal for installations without stored hot water and second bathrooms.
- Consistent showering temperature is provided. The temperature stabilising device compensated for changes in the water pressure caused by other household fittings.
- Safety devices include thermal cut out & pressure relief.
- 3 Power settings. [Cold, Warm/Eco, Hot] and a separate temperature control.
- On/Off is operated by Push Button, ensuring temperature setting remains unaffected after each use.
- Safety warning letters in a display panel indicate low pressure and therefore the shower should be turned off until pressure resumes.
- The phased shut down feature ensures all hot water is flushed out of the shower after use prolonging the shower life. This ensures lime scale build up is kept to a minimum.
- Push fit swivel inlet elbow pipe connection, enabling plumbing from 5 different directions.
- This shower is supplied with an adjustable riser kit and 3 mode rub-clean handset. The riser has a built in soap tray & integral hose retainer.
- Adjustable riser comes complete with adjustable top/bottom brackets so ideal to cover existing riser holes and tile joints.
- Incorporates a temperature control device (TCD) that activates when the temperature is too high & the water inside the heater gets too hot. The TCD will switch off the power to the heating elements and once the unit cools down to a safe temperature, will come on again.
- ThermoSafe™ Technology: Regulates the output water to minimise high/dangerous output temperatures for a safer showering experience.

TECHNICAL DATA SHEET

BRISTAN

Technical Advice:

For further information please call 0844 7016273 or email customercare@bristan.com

Guarantee:

2 years covering manufacturing faults.

Compliance / Approvals

WRAS:

Manufactured to comply with WRAS

BEAB safety:

IWH 0757

BEAB EMC:

IWH 0761


CE Mark:



Flow Rates (litres per minute)

System Pressure	8.5kW	9.5kW
Maximum Flow @ 40°C	4.0	4.5

Dimensions (mm)

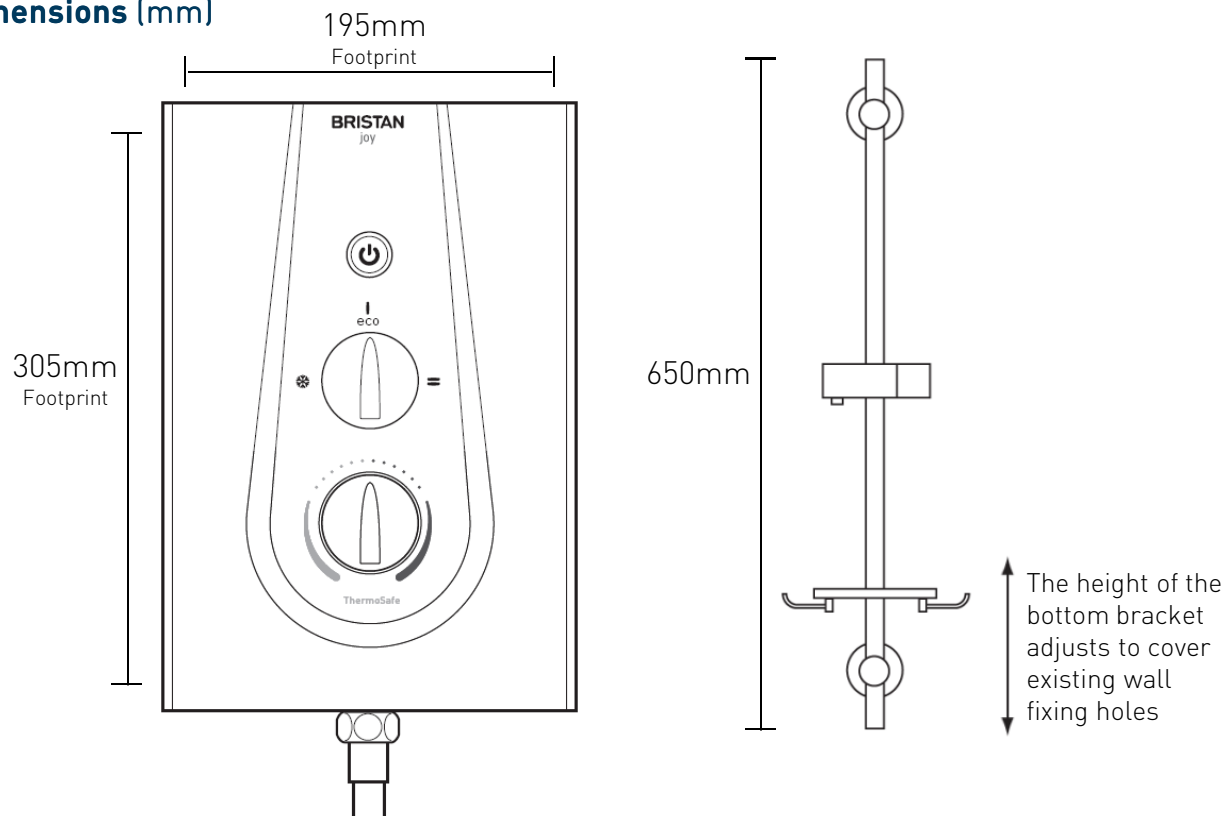

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG
Telephone: 0844 701 6274 Facsimile: 0844 701 6275
Web Site: www.bristan.com Email: enquire@bristan.com



The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuing improvement in design and performance of its products and so reserves the right to change specifications without prior notice.