TECHNICAL DATA SHEET

SMILE ELECTRIC SHOWERS Smile 8.5kW / 9.5kW

Product Specification

Product Code: Finish: Product Type: Construction: Supply: Inlet Connections: Outlet Connections: Working Pressures: SM285 W / SM295 W White Contemporary Plastic (ABS) Suitable for mains cold feed only 15mm push fit, 5 directional options G ½" Min 0.7bar, Max 10.0bar



Additional Information

- Instantaneous electric shower drawing water direct from the mains supply; ideal for installations without stored hot water and second bathrooms.
- Consistent showering temperature is provided. The temperature stabilising device compensated for changes in the water pressure caused by other household fittings.
- Safety devices include thermal cut out & pressure relief.
- 3 Power settings. (Cold, Warm/Eco, Hot) and a separate temperature control.
- On/Off is operated by a rotary dial, ensuring temperature setting remains unaffected after each use.
- Push fit swivel inlet elbow pipe connection, enabling plumbing from 5 different directions.
- This shower is supplied with an adjustable riser kit and single mode rub-clean handset, 1.5m shower hose & hose retainer.
- Adjustable riser comes complete with adjustable bottom bracket so ideal to cover existing riser holes and tile joints.
- Incorporates a temperature control device (TCD) that activates when the temperature is too high & the water inside the heater gets too hot. The TCD will switch off the power to the heating elements and once the unit cools down to a safe temperature, will come on again.



Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG Telephone: 0844 701 6274 Facsimile: 0844 701 6275 Web Site: <u>www.bristan.com</u> Email: <u>enquire@bristan.com</u>

The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuing improvement in design and performance of its products and so reserves the right to change specifications without prior notice.

D2





TECHNICAL DATA SHEET

Technical Advice:	For further information please call 0844 7016273 or email <u>customercare@bristan.com</u>
Guarantee:	2 years covering manufacturing faults.
Compliance / Approvals	
WRAS:	Manufactured to comply with WRAS
BEAB safety:	IWH 0759

BEAB EMC: IWH 0763


CE

CE Mark:

Flow Rates (litres per minute)

System Pressure	8.5kW	9.5kW
Maximum Flow ଢ 40°C	4.0	4.5

Dimensions (mm)

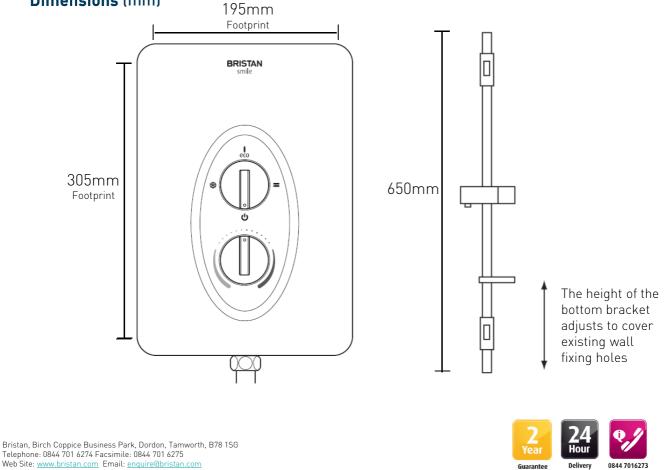

Web Site: www.bristan.com Email: enquire@bristan

D2 The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuing improvement in design and performance of its products and so reserves the right to change specifications without prior notice.

Delivery

