




TECHNICAL DATASHEET

FRENZY COOL CHROME

FRENZY THERMOSTATIC COOL CHROME SURFACE MOUNTED BAR SHOWER VALVE WITH ADJUSTABLE RISER KIT

Product Specification

| | |
|--------------------------------|-----------------------------------------------------------|
| Product Code: | FZ SHXMMCTFF C |
| Finish: | Chrome |
| Product Type: | Contemporary |
| Construction: | Body is of brass construction |
| Valve Type: | ¼ Turn ½" ceramic disc valve |
| Cartridge Type: | Thermostatic Cartridge |
| Supply: | Suitable for all plumbing systems (Preferably balanced) |
| Inlet Connections: | 15mm compression connections |
| Outlet Connection: | G ½ |
| Working Pressures: | Min 0.2bar, Max 5.0bar Maximum Static Pressure 10.0bar |
| Dimensions for Fitting: | 150mm inlet centres |

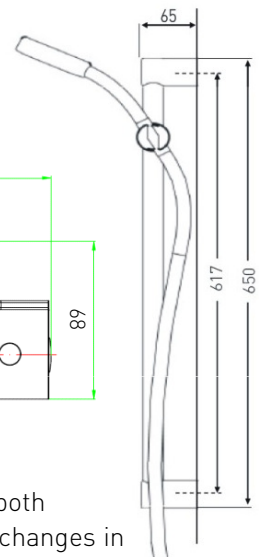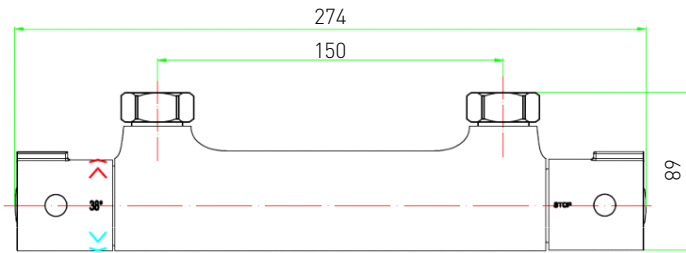

Additional Information

- Unique Cool Chrome technology ensures the bar valve stays cool to the touch while in use.
- Dual control – Flow and temperature are controlled separately, giving accurate control of both
- Thermostatic cartridge maintains showering temperature to +/- 1°C by compensating for changes in the incoming water temperature and pressure giving the stable outlet temperature
- Factory set to a maximum of 38°C to eliminate the ability to select an unsafe temperature – this is adjustable to suit user preference and up to a maximum of 46°C.
- Flow control handle incorporates an eco button to save water, this can be overridden by the user.
- Supplied with WMNT10 C fast fit connections.
- Supplied with 1.5m hose, riser rail, hose retainer and multi function handset with rub clean nozzles.
- Chrome plated to BS EN 248

Technical Advice: For further information please call 0844 7016273 or email customercare@bristan.com

Guarantee: 5 years covering manufacturing faults.

Compliance/Approvals

Manufactured to comply with WRAS

FlowRates (litres per minute)

| System Pressure (bar) | 0.2 | 0.5 | 1.0 | 1.5 | 2.0 | 3.0 | 4.0 | 5.0 |
|-----------------------|-----|-----|------|------|------|------|------|------|
| Open Outlet | 4.2 | 7.5 | 11.2 | 13.7 | 15.8 | 19.4 | 22.4 | 25.0 |

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG
Telephone: 0844 701 6274 Facsimile: 0844 701 6275
Web Site: www.bristan.com Email: enquire@bristan.com



Guarantee

Delivery

0844 7016273

D1

The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuing improvement in design and performance of its products and so reserves the right to change specifications without prior notice.