TECHNICAL DATA SHEET

SELF CLOSING Single Pillar Basin Soft Touch Timed Flow Tap Chrome (with flow regulator) Product Specification

Product Code: Finish: Product Type: Construction:

Valve Type: Supply: Inlet Connections: Working Pressures: Z2 DUS ½ C Chrome Utility Body is of brass construction and is designed to conform to BS EN 200 Self closing valve Suitable for all plumbing systems ½" BSP Min 0.5bar, Max 3.0bar





<u>121</u> 110



Additional Information

- Supplied with 5l/min flow limiter (not fitted)
- •Timed shut-off to meet BS EN 816
- Supplied with cold and hot indices for either installation.
- Chrome plated to BS EN 248.
- •Soft touch easy to use mechanism

Technical Advice:

or email customercare@bristan.com

Guarantee:

1 year covering manufacturing faults.

Compliance / Approvals

WRAS:


Certificate No: 1401911

Flow Rates (litres per minute)

System Pressure	0.2 bar	0.5 bar	1bar	2 bar	3 bar	5bar
Z2 DUS ½ C (with flow regulator)	2.6	3.6	4.2	4.8	4.9	
Z2 DUS ½ C (without flow regulator)	5.3	13.0	17.2	21.4		

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 ISG Telephone: 0844 701 6274 Facsimile: 0844 701 6275 Web Site: <u>www.bristan.com</u> Email: <u>enquire@bristan.com</u> Guarantee Delivery 0844 7016273

The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuing improvement in design and performance of its products and so reserves the right to change specifications without prior notice.

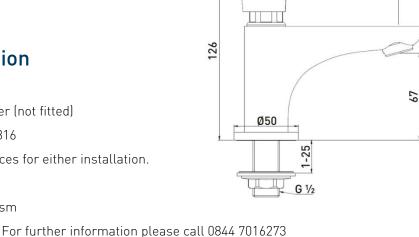

D5