

TECHNICAL DATASHEET

COMMERCIAL

OPAC THERMOSTATIC EXPOSED BAR SHOWER VALVE WITH FAST FIT CONNECTIONS


Product Specification



| | |
|--------------------------------|---|
| Product Code: | OP SHXVO EH C |
| Finish: | Chrome |
| Product Type: | Commercial |
| Construction: | Body is of brass construction and is designed to conform to BS EN 1111:1999 (HP) & BS EN 1287:1999 (LP) |
| Valve Type: | Thermostatic Cartridge |
| Supply: | Suitable for all plumbing systems (Preferably balanced) |
| Inlet Connections: | 15mm compression fast fit connections |
| Outlet Connections: | ½" BSP |
| Working Pressures: | Min 0.2bar, Max 5.0bar Maximum Static Pressure: 10.0 bar |
| Dimensions for Fitting: | 150mm inlet centres |

Additional Information

- Cool touch shower valve body for ultimate user safety.
- Easy installation with first/second fix fixing kit.
- Integral isolator & flushing mechanism for easy maintenance.
- High performance at low pressures.
- TMV2 & TMV3 approved.
- Complies with D08 specification.

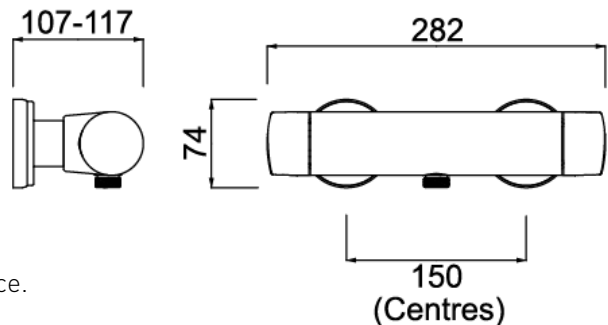

Technical Advice: For further information please call 0844 7016273 or email customer@bristan.com

Guarantee: 1 year covering manufacturing faults.

Compliance / Approvals

| | | | | |
|--------------|------------------------------|-------------|--------------|--|
| WRAS: | Certificate N ^o : | 1409054 | | |
| TMV2: | Certificate N ^o : | BC1397/0714 | TMV3: | Certificate N ^o : BC1402/0614 |

Flow Rates (litres per minute)

| System Pressure | 0.2bar | 0.5bar | 1bar | 2bar | 3bar | 4bar | 5bar |
|-----------------------------|--------|--------|------|------|------|------|------|
| With Flow Regulators Fitted | - | 9.4 | 9.5 | 11.3 | 11.8 | 11.7 | 11.4 |

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG
 Telephone: 0844 701 6274 Facsimile: 0844 701 6275
 Web Site: www.bristan.com Email: enquire@bristan.com



Guarantee

Delivery

0844 7016273

D2

The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuing improvement in design and performance of its products and so reserves the right to change specifications without prior notice.