


# X50 bidet mono

1/4 turn ceramic cartridge

flexible tails



X50 Bidet Mono Mixer Inc Click Clack Waste

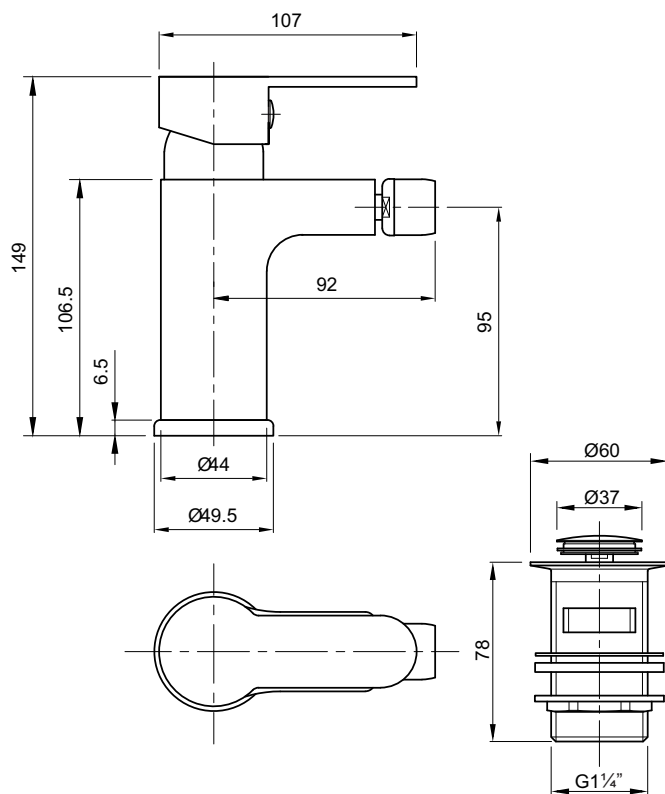

## Deck Mounted Bidet Mixer – X505135CP

Flow Rate (Litres per minute)	0.2 Bar	0.5 Bar	1.0 Bar	2.0 Bar	3.0 Bar	5.0 Bar
Standard Mixed	4.3	7.6	11.3	15.8	19.35	24.98

All measurements shown are in millimetres. Drawing sizes are not to scale.  
to specify/order: Please use the 8 or 9 character reference shown above.

### X50 bidet mono

X50 Bidet Mono Mixer  
Inc Click Clack Waste

X505135CP

### finish

Chrome plated CP.

### approvals

Product manufactured from WRAS approved materials

### standards

Chrome plated to BS EN248

### system requirements

Can be installed on any system

### recommended operating pressure

Minimum operating pressure 0.2 bar.

Maximum operating pressure 5 bar.

### note

Maximum surface thickness to fit tap is 44mm.  
Easy fit clicker waste (slotted) included.  
Attached using 'C' plate fixing kit included.