

# X50 bath shower mixer

1/4 turn ceramic cartridge



X50 Bath Shower Mixer Deck Mounted

## X50 bath shower mixer

X50 Bath Shower Mixer  
Deck Mounted

**X505265CP**

### finish

Chrome plated CP.

### approvals

Product manufactured from WRAS approved materials

### standards

Chrome plated to BS EN248

### system requirements

Can be installed on any system


### recommended operating pressure

Minimum operating pressure 1 bar.

Maximum operating pressure 5 bar.

### note

Maximum surface thickness to fit tap is 33mm.  
Plastic back nuts and shower head wall mounting bracket included.

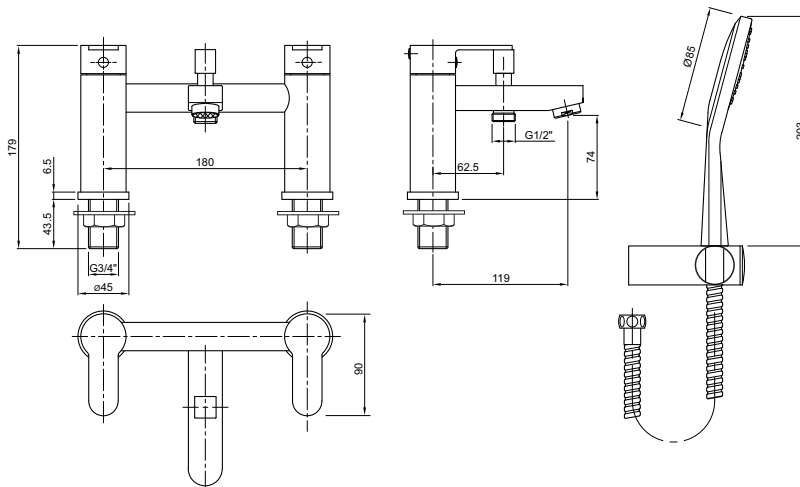

## Deck Mounted Bath Shower Mixer – X505265CP

Flow Rate (Litres per minute)	0.2 Bar	0.5 Bar	1.0 Bar	2.0 Bar	3.0 Bar	5.0 Bar
Mixed Tap Outlet	6.5	10.8	15.6	22.2	27.9	37.4
Handset	3.4	6.5	9.7	14.3	18.1	24.3
Flow Limiter Fitted In Handset (Part No:XS9008XX)	2.6	4.4	6.6	7.4	8	8

All measurements shown are in millimetres. Drawing sizes are not to scale.  
to specify/order: Please use the 8 or 9 character reference shown above.

Lawton Road, Alsager, Stoke-on-Trent ST7 2DF, UK  
Tel: +44(0) 1270 879777 Fax: +44(0) 1270 873864  
www.twyfordbathrooms.com UK Technical Helpline Tel: 0844 412 5921/01270 871 480

# Twyford