


ASSURE

ASSURE THERMOSTATIC BASIN MIXER

Product Specification

Product Code:	AS THBAS C
Finish:	Chrome plated
Product Type:	Contemporary
Construction:	Body is of brass construction and is designed to conform to BS EN 1287 / BS EN 1111
Valve Type:	½" x ½" turn rapid action valve
Cartridge:	Thermostatic
Supply:	Suitable for all plumbing systems, preferably balanced
Inlet Connections:	M10 x 15mm flexible connection tail pipes
Water Pressure:	Min 0.5 bar Max. 5.0 bar

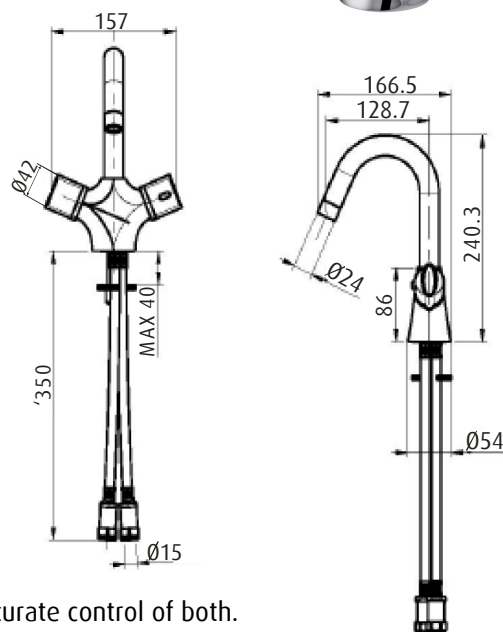

Additional Information

- Dual control – Flow and temperature are controlled separately giving accurate control of both.
- Rapid action half turn valve giving an easy ½ turn action.
- Thermostatic cartridge maintains showering temperature to +/-1°C by compensating for changes in the incoming water temperature and pressure giving the stable outlet temperature.
- Automatic shut off in the event of hot or cold water supply failure, thus reducing the risk of any injury.
- Factory set to 38°C to eliminate the ability to select unsafe temperature, this can be overridden by user to a maximum of 48°C.
- Chrome plated to BS EN 248.

Technical Advice: For further information please call 0844 7016273 or email customercare@bristan.com
Guarantee: 5 years covering manufacturing faults

Compliance/Approvals

WRAS: Pending

Flow Rates (litres per minute)

System Pressure	0.6bar	1.0bar	2bar	3bar	5bar
Full flow	8.8	11.5	16.4	20.2	26.0
Eco setting	4.9	6.3	8.9	10.8	13.7

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 15G
 Telephone: 0844 701 6274 Facsimile: 0844 701 6275
 Web Site: www.bristan.com Email: enquire@bristan.com

