

# D1089

TMV



D1089

PN10



PUBLIC HEALTH


## Features & Benefits

- A self-acting Thermostatic Mixing Valves designed to blend hot and cold water, to ensure a constant, controlled safe outlet temperature
- Fulfills the 'duty of care' requirements against scalding
- Ideal for healthcare, schools, workplace and domestic environments
- Flat face union ensures easy removal for maintenance
- Integral strainers and check valves
- Tamper-proof adjustment
- Includes ball valves for isolation
- WRAS Approved maximum operating temperature 85°C

## Materials

PART	MATERIAL	SPECIFICATION
Body	Chrome Plated DZR Brass	CW602N
Bonnet	Chrome Plated DZR Brass	CW602N
Check Valve	Body - POM O-ring - EPDM Spring - Stainless Steel	- - AISI304
Cap	ABS	-
Element	-	-
Strainer	Stainless Steel	AISI304
Water Flow Directors	PSU	-
Spring	Stainless Steel	AISI304
O-Ring	EPDM	-
Ball	Chrome Plated Brass	CW607N
T-Handle	Al Alloy	-
Ball Seat	PTFE	-
Compression Olive	Brass	CW507L

## Dimensional Drawing

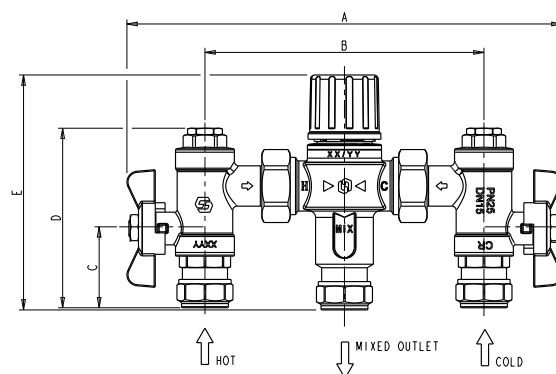

## Dimensions & Weights

SIZE (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	WEIGHT (kg)
15	200	128	36	82	108	0.82
22	200	129	38	86	110	1.01

## Limits of Use

Crane D1089 valves have been approved for use on the following designated systems:

HIGH PRESSURE (HP)	LOW PRESSURE (LP)	APPLICATION	MAX MIXED TEMPERATURE
HP-B	LP-B	Bidet	38°C
HP-S	LP-S	Shower	41°C
HP-W	LP-W	Wash Basin	41°C
HP-T	-	Bath	44°C
HP-T44	-	Bath	44°C

**PRESSURE RATING:** PN10

**OPERATOR:** Lockshield

**SPECIFICATION:** The D1089 Thermostatic Mixing Valve is a WRAS approved product listed in the WRAS Approvals Directory.

**FACTORY SETTING:** 41°C

**TEMPERATURE SETTING RANGE:** 30-50°C

**MINIMUM HOT TO MIX TEMPERATURE:** 12°C

**COLD WATER SUPPLY TEMPERATURE:** 5-25°C

**HOT WATER SUPPLY TEMPERATURE:** 55-65°C

**TEMPERATURE STABILITY:** ±2°C

**MAXIMUM WORKING PRESSURE:** 10 bar

**SUPPLY PRESSURE IMBALANCE DYNAMIC:** 2:1

Valid as of 31/03/26

Every effort has been made to ensure that the information contained in this publication is accurate at the time of publishing. Crane Ltd assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.