Commercial & public fittings > Basin fittings > Electronic tap > TABLE MOUNTED

TEMPOMATIC :

SPECIFICATIONS

Electronic basin tap with 6V Lithium battery (separate electronic control box IP65). Infrared detection of presence. Removable spout L.140. Regulated flow rate 8l./min. with scale proof aerator and anti-blocking in flow safety device. Reinforced fixing by 2 stainless steel rods and lock-nuts. Anti-legionella duty flush (45 sec each 24h after the last use). Brand DELABIE type TEMPOMATIC battery operated. Ref. 445006

Réf. : 445006 : battery operated 6V with fixed removable spout

» We recommend to provide a PREMIX compact thermostat for mixed water to be installed under the washbasin (see below).

FONCTIONING AND APPLICATION

• Automatic opening/closing by presenting/removing hands from sensor detection range.
• Use: all public and commercial places, medical sector and food industry, disabled person sanitaries, offices, restaurants…

PRODUCT ADVANTAGES

• REMOVABLE SPOUT for sterilization.
• FREEDOM OF INSTALLATION on any isolated basin (no additional power supply required) due to integrated battery.
• AESTHETIC: fluid, timeless and high-tech.
• FULL HYGIENE without manual contact, avoiding the propagation of bacteria/germs carried by the hands.
• WATER SAVING: about 80% in comparison to classical taps (due to shorter flow rate and flow duration).
• VANDAL-PROOF: reinforced fixing and shock-proof detection cell.
• ANTI-BLOCKING SAFETY: avoids risk of continuous flow (automatic closing after 60 sec. of continuous detection in case of malevolence, automatic reset).
• RELIABILITY: corrosion-proof solenoid valve. Foolproof detection of presence.
• EASY MAINTENANCE: independent separately accessible units and auto-diagnostic leds.
• SCALE PROOF AERATOR: 10 times slower scale deposit than a standard aerator.
• 3 YEARS WARRANTY.
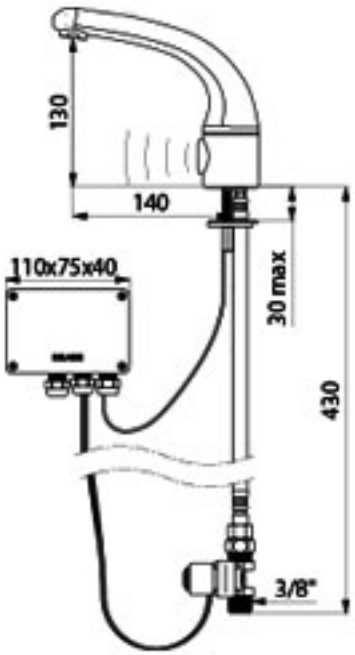
445006