

intamix pro V thermostatic mixing valve

intamix pro
provides
a **high** volume of
water at **stable**
temperatures

The Intatec range of thermostatic mixing valves is designed primarily for single outlet use. It delivers safe, blended hot water to taps, showers, bidets and other water outlets, making it ideal for use in hospitals, schools and leisure centres.

The Intamix Pro V is designed for use in applications where a high volume of water is required at the outlet such as bath. Providing a high volume of water at a stable temperature, the IntaMix Pro V reflects the quality of the Intatec range of total washroom solutions.

- Tamper proof head
- Single piece thermostatic cartridge construction
- High flow rate
- Adjustable outlet temperature
- Automatic shut off in the event of hot or cold water failure
- Temp. stability +/- 2°C
- Supplied with isolation ball valves

■ Specification

- WRAs Approved
- TMV2 Approved

■ Product Range

Connection/type	size	code
Compression cu x cu x cu with check valves	22mm	61022CP
Compression cu x cu x cu with check valves	28mm	61028CP

Technical Data

Materials

Body	DZR Brass
Cartridge	DZR Brass
Shutter	DZR Brass
Spring	Stainless steel
Seal Components	EPDM



Performance

Maximum Working Pressure	14 Bar - Static
	5 Bar - Dynamic
Maximum Inlet Temperature	85°C
Max. Inlet Pressure Ratio (H/C or C/H)	2:1
Outlet Adjustment Range	30°C - 65°C

Connections

Connections	22mm & 28mm Compression
-------------	-------------------------

Flow Rate

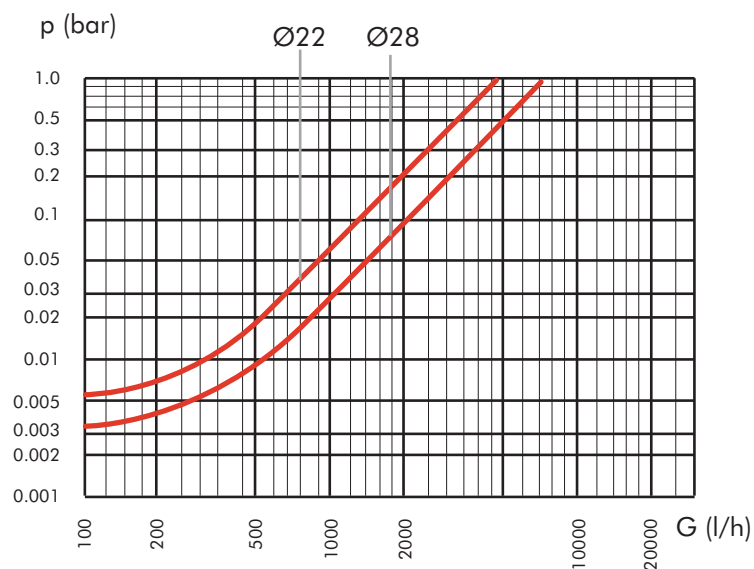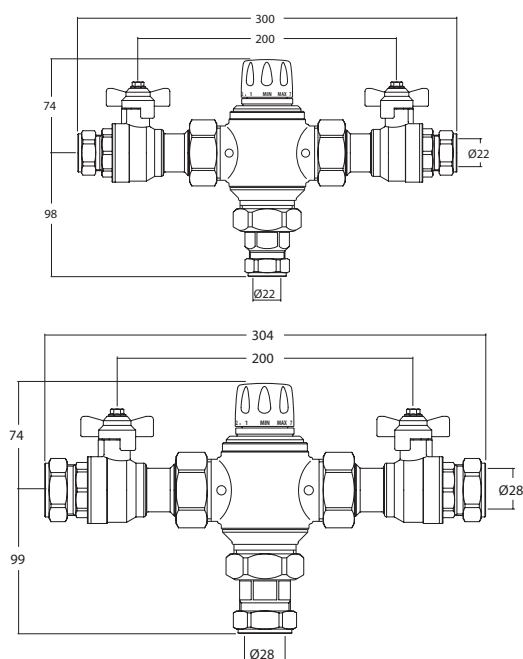

Size	22mm	28mm
Kv(m³/h)	4.0	4.5

 inspiring confidence

inta

intatec limited

Airfield Industrial Estate, Hixon
Staffordshire, ST18 0PF

T: 01889 207200

F: 01889 271172

E: sales@intaco.co.uk

www.intaco.co.uk

E&OE 07/06