

**Lavatory-mounted soap dispenser, ABS**
**Código: DJT118**
**General description**


- Liquid soap dispenser, lavatory-mounted.
- Press piston down.
- Robust and vandal-resistant.
- Suitable for high traffic facilities.
- Model suitable for public use.
- It normally goes along with a warm air hand dryer.

**Components and Materials**

- Shatter-resistant polyethylene container. To be installed in 25mm diameter in countertops adjacent to lavatories. Refilled by using the special refilled key to unlock the escutcheon and remove the valve body with dip tube from the shank.
- Stainless steel AISI 304 press piston and spout, bright polished finish, 88 mm long.
- Black high impact resistant ABS screw shank with basin nut.
- Pushing down ABS valve with ABS cylinder, NBR spout and stainless steel spring.
- High impact resistant stainless steel AISI 304 escutcheon, bright finish.
- Suitable soaps: Hand soaps, with neutral PH, not containing chlorine.

**Technical Specifications**

Capacity - 0,85 L
Quantity dispensed per pulsation - 1 ml
Operable force - 20 N
Escutcheon - Ø 50 mm
Diameter hole - Ø 25 mm
Screw shank high - 118 mm
Container height - 216 mm
Weight (empty dispenser) - 0,425 Kg

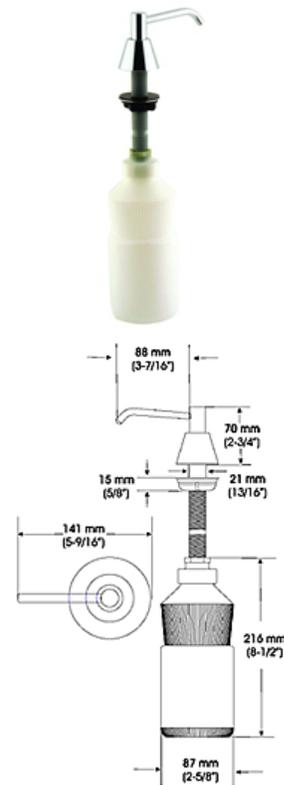

Dim.: ±4%

**Operation**

Press down push-button manually to dispense a measured amount of liquid soap. Valve is operable with one hand, without tight grasping, pinching, or twisting of the wrist. Vandal-resistant spout can rotate 360° without damage the unit. Dispenser is refilled by using the special refill key to unlock the escutcheon and remove the valve body with dip tube from the shank. Unit may also be filled by removing container from below lavatory.

**Certificates & Qualifications**

ISO 9001:2008.

**Specifications**

Lavatory-mounted liquid soap dispenser, press piston down operated, robust and vandal-resistant suitable for high traffic facilities with shatter-resistant polyethylene container. To be installed in 21mm diameter in countertops adjacent to lavatories. Refilled by using the special refilled key to unlock the escutcheon and remove the valve body with dip tube from the shank. The dispenser should include a stainless steel AISI 304 piston bright finish and spout, 88 mm long, black high impact resistant ABS screw shank, pushing down chromed brass valve with ABS cylinder, stainless steel spout and spring. Vandal-resistant spout can rotate 360° without damage the unit. Dispenser is refilled by using the special refill key to unlock the escutcheon and remove the valve body with dip tube. Unit may also be filled by removing container from below lavatory. The soap dispenser should be suitable for commercially marketed all purpose liquid and lotion hand soaps and synthetic detergents except for surgical soaps.

Liquid soap dispenser shall be model DJT118, stainless steel AISI 304 bright finish, of Mediclinics S.A., C/ Industria 54, E-08025 Barcelona, Spain.

Mediclinics, S.A., reserves the right to make changes and/or modifications to the products and their specifications without prior notice.

mediclinics S.A

