

MEYNELL V8/3 THERMOSTATIC MIXER

- TMV3 approved for use in healthcare applications
- Also approved to the TMV2 standard for residential use
- High flow rates at low pressures
- Reliable thermostatic performance
- Safe thermostatic shutdown in less than 2 seconds
- Suitable for use on all plumbing systems
- Exposed, lockshield and long lever versions available
- Single sequential control for ease of use

**Specify as: Meynell V8/3 (PESM0563P)**

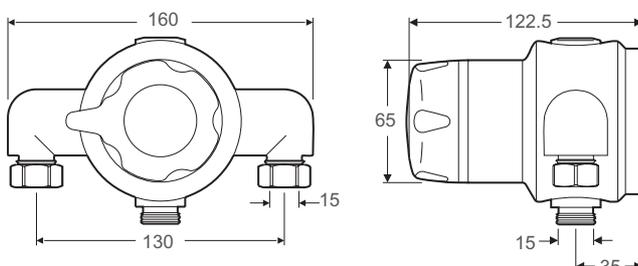
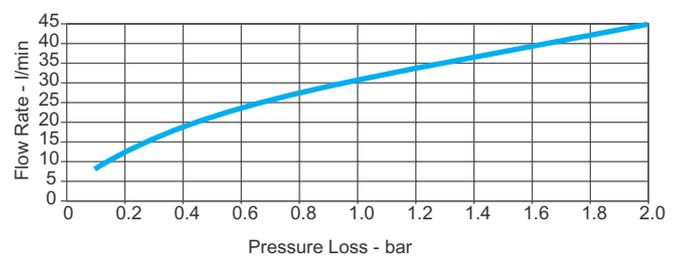
½" exposed single sequential thermostatic mixing valve. Supplied complete with integral strainers.

Specify as: Meynell V8/3 L (PESM0625P)

½" exposed single sequential thermostatic mixing valve with long lever for disabled use. Supplied complete with integral strainers.

Specify as: Meynell V8/3 K (PESM0626P)

½" exposed 'lockshield' thermostatic mixing valve featuring a tamper proof cover with pre-set maximum temperature stop facility adjustable to suit site requirements. Supplied complete with integral check valves and strainers. Please contact Specification Enquiries for further advice.

Dimensions (mm)**Flow Diagram**

Kohler Mira Limited
Cromwell Road
Cheltenham
Gloucestershire
GL52 5EP

Specification Enquiries
Tel: 01242 282527
Fax: 01242 282404
Email: rada_technical@mirashowers.com
www.radacontrols.com



INDIVIDUAL SHOWERING

TECHNICAL SPECIFICATION

Installation and Maintenance

Please refer to the appropriate Product Manual.

Connections

Inlets: 15 mm compression.

Reversible outlet connector: ½" BSP male or 15 mm compression (compression nut and olive may be required for the exposed models).

Standard connections are **hot-left, cold-right**, bottom outlet when facing the control.

Approvals

Buildcert TMV3 Thermostatic Mixing Valve Scheme approved:

LP-S - Low Pressure Shower

HP-S - High Pressure Shower

Certificate No: ETC/22/0897.

Complies with the technical requirements of BS7942 for the same designations.

Buildcert TMV2 Thermostatic Mixing Valve Scheme approved:

LP-S Low Pressure shower

HP-S High Pressure Shower

Certificate No: BC197/0406

Designed to comply with European Standards EN1111 and EN1287.

WRAS approved (Water Regulations Advisory Scheme).

Designed, manufactured and supported in accordance with accredited

BS EN ISO 9001:2000 Quality Management Systems and

BS EN ISO 14001:2004 Environmental Management Systems.

Operation

All V8/3 valves (excluding 'lockshield' model) are operated via a single sequential control which when rotated, initially opens the valve, then increases the temperature from cold through to a pre-settable maximum temperature stop.

Materials

Body: DZR brass chrome plated.

Temperature Range

Factory preset maximum outlet temperature: 42°C.

Minimum temperature differential between hot inlet and preset outlet temperature: 10°C.

Optimum temperature control range: 35°C - 45°C.

Maximum hot water temperature: 85°C (for safety reasons it is recommended that hot water storage temperature is maintained at between 60°C to 65°C in ablutionary applications).

The performance specification outlined below is achieved with outlet blend temperature set between 35°C - 45°C and supplies of 15°C cold and 65°C hot with nominally equal pressures:

Outlet blend temperature is maintained within 2°C with a 10°C change in hot or cold supply.

Shutdown of outlet flow to seepage within 3 seconds in the event of failure in either the hot or cold water supply, providing the blend temperature differs from the inlet supply temperature by at least 10°C. The valve will maintain control with a pressure loss ratio of up to 10:1.

Pressures

For optimum performance, maintained supply pressures should be nominally equal.

Minimum maintained pressure 0.1 bar*

Maximum static pressure: 10 bar

Maximum pressure loss ratio **: 10:1 (in favour of either supply)

* 1 metre head from underside of cold tank to outlet of shower fitting.

** Pressure loss ratio is determined by subtracting the resistance to flow of the outlet pipework and outlet fittings (generally known as the 'back pressure', and measured at the outlet of the mixing valve) from the dynamic pressures of the hot and cold water at the inlets of the mixing valve. This is at its extreme when the mixing valve is being used at its lowest flow rate and when the maximum inequality occurs in the pressure of the hot and cold water supplies.

Weight

Product	Gross Weight (Kgs)	Total Packaged Weight (Kgs)
Meynell V8/3	3.000	3.228
Meynell V8/3 L	3.000	3.230
Meynell V8/3 K	3.000	3.230

Kohler Mira Limited
Cromwell Road, Cheltenham
Gloucestershire, GL52 5EP

Specification Enquiries

Tel: 01242 282527, Fax: 01242 282404
Email: rada_technical@mirashowers.com
www.radacontrols.com

Rada is a registered trademark of Kohler Mira Limited.

The company reserves the right to alter product specification without notice.
© March 2008 Kohler Mira Limited. All rights reserved.

No part of this document, or any accompanying document, may be reproduced or transmitted in any form or by any means, including photocopying or electronically, without the permission of Kohler Mira Limited.

A **KOHLER COMPANY**



FM 14648



P3229/7



For latest prices and delivery to your door visit MyTub Ltd 0845 303 8383 www.mytub.co.uk