




*Wall-mounted  
version*



CISTERN FRAME

# WERSO BCM 800

## Control plates



White



BRIGHT / mat chrome-plated



MAT / bright chrome-plated

## Installations



Particularly low (80 cm) allowing **UERSO BCM 800** to be used for installing a toilet on those "lost" corners:

- Under the eaves
- Under a window
- Under the stairs

## Structure



Designed for attachment to the floor (2 points) and wall (6 points), allows the installation of a suspended toilet bowl secured to a light partition.

Made of steel tubes (30 x 30 x 1.5 mm) connected by electro-welding and coated with epoxy paint guaranteed for 25 years to protect against corrosion (600 hours of resistance to salt spray).

Conforms to NF standard (tested at 400 kg)

## Feet and adjustments



The feet consist of a large bichromate steel plate (100 x 30 x 8 mm) and two electro-welded bichromate steel tubes (25 x 25 x 3 mm).

They slide inside the structure for adjusting the frame height by 200 mm.

This adjustment range means that the bowl can be placed at between 325 and 525 mm, especially when the installation is intended for disabled people.



## Attachments



The feet are attached to the structure by 4 setscrews allowing adjustment to within the millimeter by simple tightening.

Attachment to the floor is by eight plugs and screws of top quality.

Attachment of the bowl is by two 12 mm threaded rods and 2 wall brackets made integral with the structure.



## *Cistern*

The cistern is of impact polystyrene (offering high resistance to thermal variations and aging) with a maximum capacity of 9 liters.



It features internal insulation (PSE monoblock shell) to prevent condensation and increasing the sound insulation of the installation.

Each cistern is tested individually in the works.



## *Cistern equipment*

Consisting of a dual flush mechanism and a silent float valve, both derived from the SIAMP standard range.

These products are NF and have therefore gone through the 200,000 maneuvers test. The equipment was chosen by the biggest ceramic producers in the world for their own equipment.


## *Cistern water connection*

Connection is directly inside the cistern to prevent any risk of leakage on the outside.

The supply can use any type of pipe (copper, reticulated, PVC, flexible, etc.), and the shutoff valve has a bicone attachment.



# WERSO BCM 800

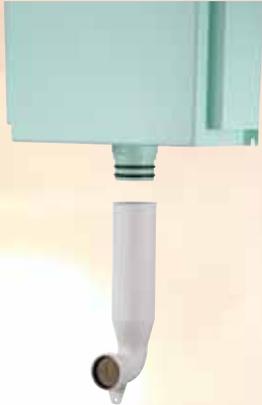

## Supply

Perfect tightness: the bend is of PEHD to guarantee correct sizing.

Tightness is provided by two O-rings on the outlet from the cistern and on the supply sleeve, on the bend side by a lip seal and on the bowl side by a multi-lip seal.

## Drain

Easy implementation: the installation of the bowl drain pipe is facilitated by the material (PVC) to be bonded to the pipe and its attachment to the support frame by a clip-in collar.



Tightness on the bowl side is made by an EPDM seal.





## Maintenance


Easy access: depending on the hardness of the network water, it may be necessary to clean or replace the seals and membrane of the cistern equipment.



The control plate is used as an access trap and the cistern equipment is directly accessible and easy to remove from the cistern.

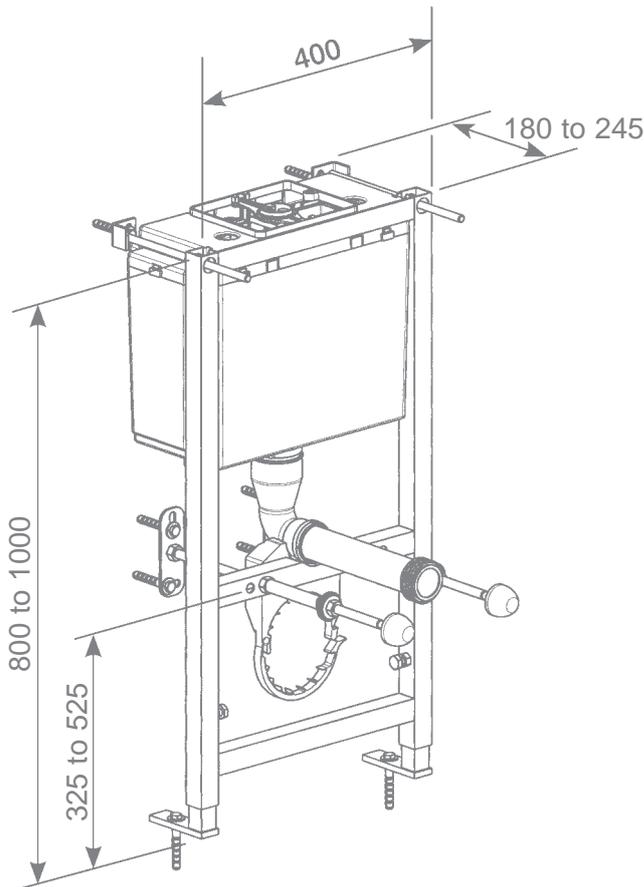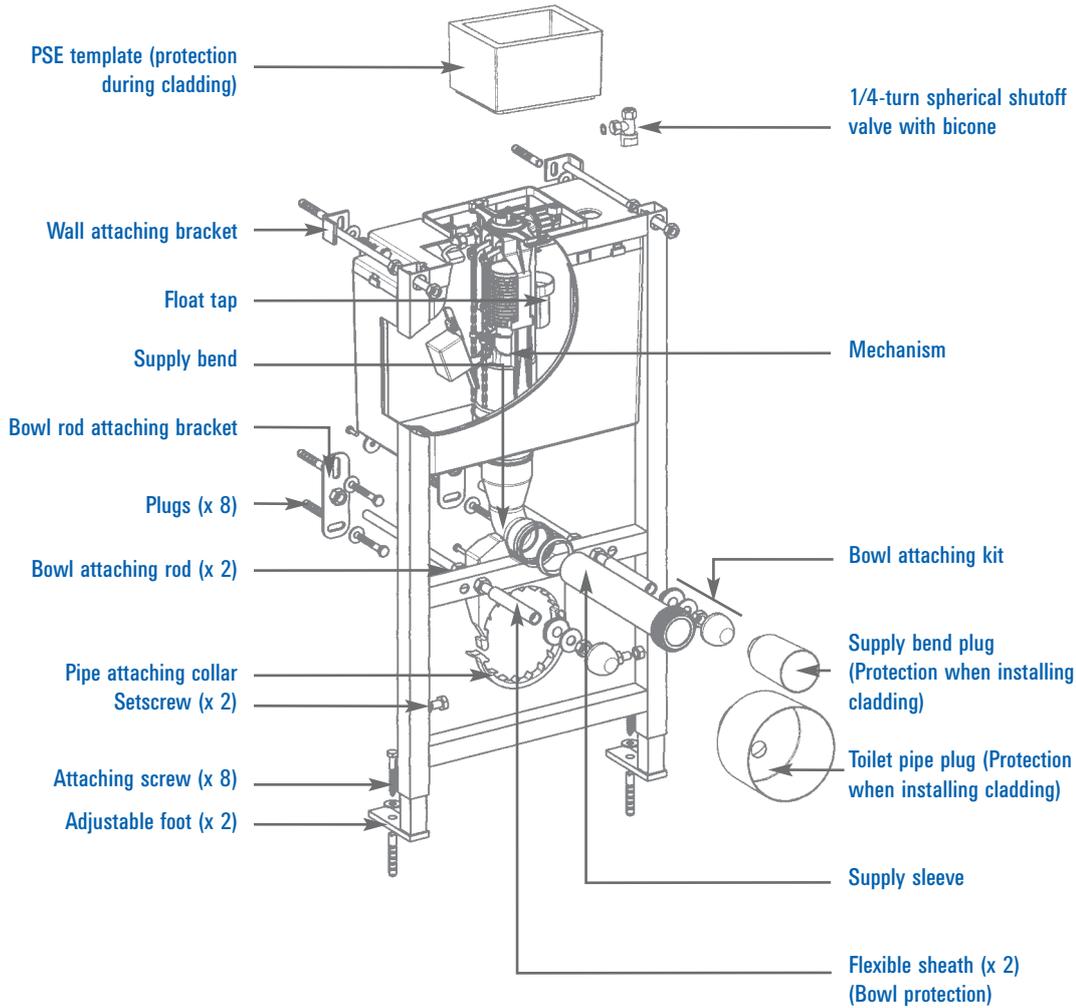

Installation type



Attached to a bearing wall

# WERSO BCM 800