

ARMITAGE SHANKS

healthcare HTM64 (JU) janitorial unit


JU stainless steel janitorial unit incorporating cleaners' sink and handrinse basin, with earthing terminal.

Small lever handles to meet DDA requirements.

- Combination sink and basin assembly
- Supported on legs
- Stainless steel



500 47 47 37 I taphole Ø35 88 260 ³² 570

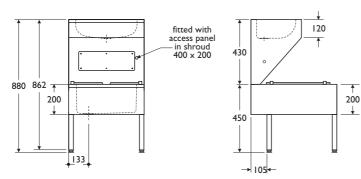

Illustrated

S6509MY (JU) Janitorial unit in stainless steel 50cm wide x 57cm projection x 88cm high complete with tamper proof concealing panel for basin trap, hinged bucket grating to sink, stainless steel legs with adjustable feet B2809AA Monoblock mixer with swivel nozzle, lever handles, chromium plated **S8734AA** 11/4in waste with swivel plug S8920 (TRR1/P) 11/4in plastic resealing bottle trap, 75mm seal S8760 (WT2) 11/2in unslotted strainer waste **S8925 (TRR2P)** 11/2in plastic resealing bottle trap, 75mm seal

Material

Stainless steel type 1.4301 (304) Bowls 0.9mm before forming Body 1.5mm

Weight

22.0kg

Exposed surfaces polished with 240 grain

Standards

Functional Standard; DDA, BS8300

Options

S7435AA Nuastyle 1/2in under basin thermostatic valve with anti tamper shield, Inlets and outlet suitable for 15mm copper

Special notes

Lever mixer is provided with swivel nozzle for use with either handrinse basin or cleaners sink below. Unit is supported on four stainless steel legs with adjustable feet. Holes are provided in back flange to secure to

Hot supply will need thermostatic S7435AA mixer TMV3 D08 for safe hot water delivery to hand use.

For disposal of liquid waste by domestic services staff





