

TECHNICAL DATA SHEET

SMILE ELECTRIC SHOWERS

Smile 8.5kW / 9.5kW

Product Specification

Product Code:	SM285 W / SM295 W
Finish:	White
Product Type:	Contemporary
Construction:	Plastic (ABS)
Supply:	Suitable for mains cold feed only
Inlet Connections:	15mm push fit, 5 directional options
Outlet Connections:	G ½"
Working Pressures:	Min 0.7bar, Max 10.0bar



Additional Information

- Instantaneous electric shower drawing water direct from the mains supply; ideal for installations without stored hot water and second bathrooms.
- Consistent showering temperature is provided. The temperature stabilising device compensated for changes in the water pressure caused by other household fittings.
- Safety devices include thermal cut out & pressure relief.
- 3 Power settings. (Cold, Warm/Eco, Hot) and a separate temperature control.
- On/Off is operated by a rotary dial, ensuring temperature setting remains unaffected after each use.
- Push fit swivel inlet elbow pipe connection, enabling plumbing from 5 different directions.
- This shower is supplied with an adjustable riser kit and single mode rub-clean handset, 1.5m shower hose & hose retainer.
- Adjustable riser comes complete with adjustable bottom bracket so ideal to cover existing riser holes and tile joints.
- Incorporates a temperature control device (TCD) that activates when the temperature is too high & the water inside the heater gets too hot. The TCD will switch off the power to the heating elements and once the unit cools down to a safe temperature, will come on again.

TECHNICAL DATA SHEET

BRISTAN

Technical Advice: For further information please call 0844 7016273 or email customercare@bristan.com

Guarantee: 2 years covering manufacturing faults.

Compliance / Approvals

WRAS: Manufactured to comply with WRAS

BEAB safety: IWH 0759


BEAB EMC: IWH 0763

CE Mark: 

Flow Rates (litres per minute)

System Pressure	8.5kW	9.5kW
Maximum Flow @ 40°C	4.0	4.5

Dimensions (mm)

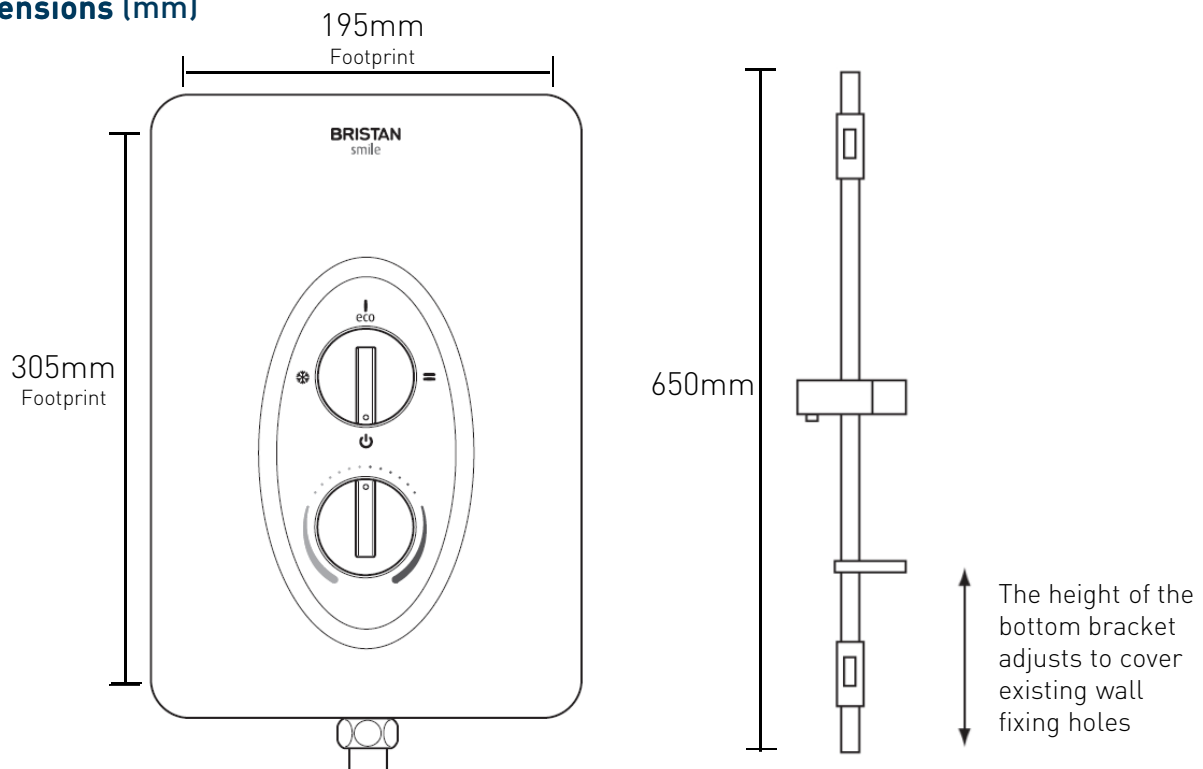

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG
Telephone: 0844 701 6274 Facsimile: 0844 701 6275
Web Site: www.bristan.com Email: enquire@bristan.com



The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuing improvement in design and performance of its products and so reserves the right to change specifications without prior notice.