

Swing

Designer

The curved cover of the Swing makes it a focal point in any room. And with a choice of 35 colours you can make a real statement.



Colour shown is A3002 Carmine Red

BIM

5
FIVE YEAR
WARRANTY

12 models

Heights: 1820mm & 2020mm

Lengths: 504mm to 727mm

Outputs: 1224 to 2376 watts, 4176 to 8107 Btu/hr

Types: P+ & K2



@stelrad



facebook.com/stelradradiators



Call **0844 543 6200** visit **Stelrad.com**

For latest prices and delivery to your door visit MyTub Ltd - www.mytub.co.uk - info@mytub.co.uk

Leading the way

mytub

Stelrad Swing

50 Δ t (75/65/20°C)

P+

K2

Height	Emitter length		Casing length	UIN	Heat output		Casing length	UIN	Heat output	
	mm	mm			Watts	Btu/hr			mm	Watts
1820	400	504	38418210	1224	4176	527	38418220	1476	5036	
	500	604	38518210	1530	5220	627	38518220	1845	6295	
	600	704	38618210	1836	6264	727	38618220	2214	7554	

2020	400	504	38420210	1308	4463	527	38420220	1584	5405
	500	604	38520210	1635	5579	627	38520220	1980	6756
	600	704	38620210	1962	6694	727	38620220	2376	8107

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C if you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer).

40 Δ t (65/55/20°C)

P+

K2

Height	Emitter length		Casing length	UIN	Heat output		Casing length	UIN	Heat output	
	mm	mm			Watts	Btu/hr			mm	Watts
1820	400	504	38418210	863	2943	527	38418220	1040	3549	
	500	604	38518210	1078	3679	627	38518220	1300	4437	
	600	704	38618210	1294	4415	727	38618220	1560	5324	

2020	400	504	38420210	922	3146	527	38420220	1116	3809
	500	604	38520210	1152	3932	627	38520220	1396	4762
	600	704	38620210	1383	4718	727	38620220	1675	5714

30 Δ t (55/45/20°C)

P+

K2

Height	Emitter length		Casing length	UIN	Heat output		Casing length	UIN	Heat output	
	mm	mm			Watts	Btu/hr			mm	Watts
1820	400	504	38418210	630	2151	527	38418220	760	2594	
	500	604	38518210	788	2688	627	38518220	950	3242	
	600	704	38618210	945	3226	727	38618220	1140	3890	


2020	400	504	38420210	674	2298	527	38420220	816	2784
	500	604	38520210	842	2873	627	38520220	1020	3479
	600	704	38620210	1010	3447	727	38620220	1224	4175

EN 442 Certification Data - CETIAT tested in accordance with BS EN 442

Type	P+		K2	
	1820	2020	1820	2020
Height	1820	2020	1820	2020
W/m at 75/65/20	3060	3270	3690	3960
n-coefficients	1.30	1.30	1.33	1.33
Heated Surface Area (m ² /m)	13.58	16.20	29.90	37.74
Weight (kg/m)	96.00	106.20	105.30	116.40
Water Contents (l/m)	15.90	17.70	15.90	17.70
Wall to tap centre (mm)	65	65	77	77


Stelrad Swing mounting brackets

Height		H2		H3		H4	
mm	in	mm	in	mm	in	mm	in
1800	70.87	70	2.75	830	43.89	1590	63.58
2000	78.74	70	2.75	930	47.83	1790	71.46




Stelrad Swing wall mounting information


All dimensions in mm. Inches in brackets.

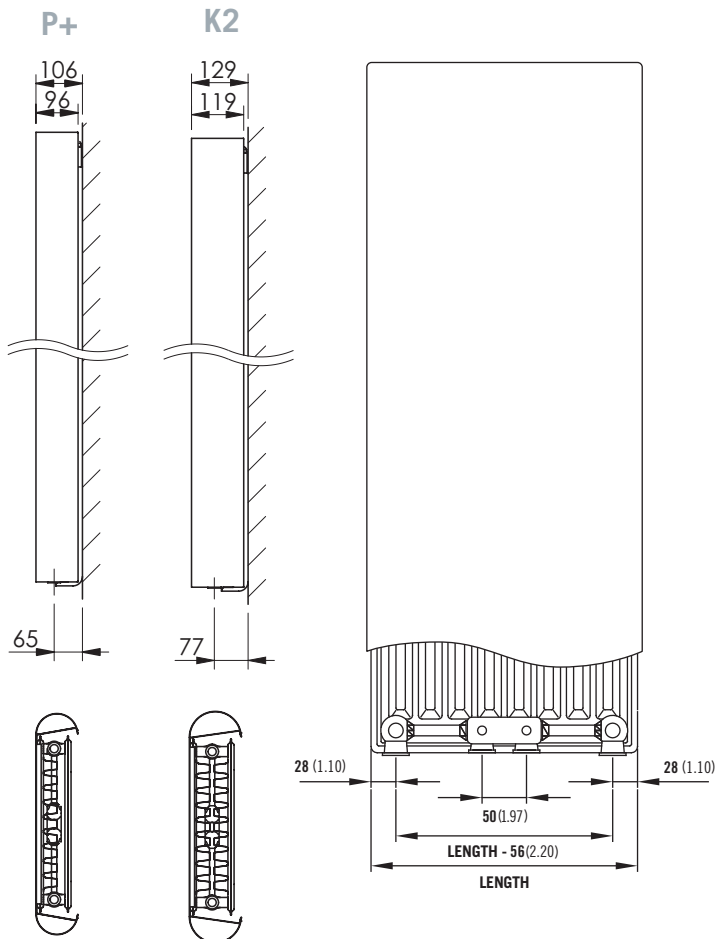

Swing piping options

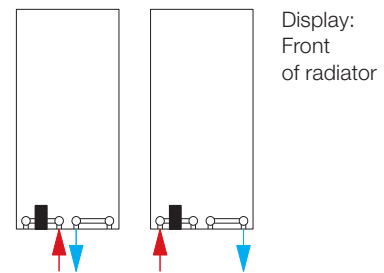

Tapping Centres



L - P+	L - K2	L _H
mm	mm	mm
504	527	344
604	627	444
704	727	544















Comes complete with Stelrad's class leading safety bracket.

colourful inspiration


A shade for every room, for every interior. Opt for warm elegance, baroque ambience or modern minimalism. With Stelrad, you can heat your home in colour. Choose from a full range of stylish radiator colours.

Below colours for Caliente Towel Rail















Natural Colour

						
NT110 Papyrus white	NT120 Pearl white	NT130 Champagne	NT140 Beige	NT150 Beige grey	NT160 Pebble grey	NT170 Quartz grey
						
SN110 Cream white	SN120 Cream	SN130 Mocca	SN140 Bordeaux	SN150 Sepia	SN160 Pale blue	SN170 Black

Metallic Colours

						
ML110 Dove grey	ML120 Titanium grey	ML130 Blue grey	ML140 Granite	ML150 Cappuccino	ML160 Terra brown	ML170 Graphite black

RAL Colours

						
A1004 Golden yellow	A2003 Pastel orange	A3002 Carmine red	A3003 Robin red	A5002 Ultramarine blue	A6018 Yellow green	A7001 Silver grey
						
A7011 Iron grey	A7016 Anthracite grey	A7030 Stone grey	A7035 Light grey	A8017 Chocolate brown	A9003 Signal white	A9005 Jet black

Please note: When a coloured radiator or radiators over 2 metres have been ordered they cannot be cancelled or returned. All colour radiators have a 6 week lead time.

To request a colour chart and details of how to order please email marketing@stelrad.com